



Genesys Logic, Inc.

GL854G-1x

USB 2.0 MTT 7-Port Hub Controller

Datasheet

**Revision 1.07
May 30, 2013**



Copyright

Copyright © 2013 Genesys Logic, Inc. All rights reserved. No part of the materials shall be reproduced in any form or by any means without prior written consent of Genesys Logic, Inc.

Ownership and Title

Genesys Logic, Inc. owns and retains of its right, title and interest in and to all materials provided herein. Genesys Logic, Inc. reserves all rights, including, but not limited to, all patent rights, trademarks, copyrights and any other propriety rights. No license is granted hereunder.

Disclaimer

All Materials are provided “as is”. Genesys Logic, Inc. makes no warranties, express, implied or otherwise, regarding their accuracy, merchantability, fitness for any particular purpose, and non-infringement of intellectual property. In no event shall Genesys Logic, Inc. be liable for any damages, including, without limitation, any direct, indirect, consequential, or incidental damages. The materials may contain errors or omissions. Genesys Logic, Inc. may make changes to the materials or to the products described herein at anytime without notice.

Genesys Logic, Inc.

12F., No. 205, Sec. 3, Beixin Rd., Xindian Dist. 231,

New Taipei City, Taiwan

Tel : (886-2) 8913-1888

Fax : (886-2) 6629-6168

<http://www.genesyslogic.com>

Revision History

Revision	Date	Description
1.00	08/13/2010	First formal release
1.01	09/09/2010	Update Ch3 Pin Assignment, p.8-11
1.02	01/19/2011	Modify Ch4 Block Diagram, p.12
1.03	07/15/2011	Update Table 3.1, 3.2 RREF I/O type, p.9, 10
1.04	05/23/2012	Update Table 3.2 - Pin Descriptions-Power/ Ground, p.11 Updated CH8 Ordering Information, p.24
1.05	07/09/2012	Updated Figure 5.5 and Table 5.1, p. 16, 17
1.06	08/31/2012	Updated Table 6.6 - GL854G-1x Power Consumption, p. 22
1.07	05/30/2013	Updated CH5.2.4 Non-removable Port Configuration, p. 19

Table of Contents

CHAPTER 1 GENERAL DESCRIPTION	6
CHAPTER 2 FEATURES.....	7
CHAPTER 3 PIN ASSIGNMENT	8
3.1 Pinouts	8
3.2 Pin List.....	9
3.3 Pin Descriptions	9
CHAPTER 4 BLOCK DIAGRAM	12
CHAPTER 5 FUNCTION DESCRIPTION.....	13
5.1 General Hub Functions.....	13
5.1.1 MCP Architecture	13
5.1.2 USB Transceiver	13
5.1.3 Multiple-TT Architecture	13
5.1.4 Port Power Control	13
5.1.5 Port Indicator.....	14
5.1.6 Operation Scheme.....	14
5.2 Configuration and I/O Settings	16
5.2.1 RESET Setting	16
5.2.2 PGANG/SUSPND Setting	17
5.2.3 Power Control.....	19
5.2.4 Non-removable Port Configuration.....	19
5.2.5 EEPROM Setting.....	19
CHAPTER 6 ELECTRICAL CHARACTERISTICS.....	20
6.1 Maximum Ratings	20
6.2 Operating Ranges	20
6.3 DC Characteristics	20
6.4 Power Consumption	22
6.5 AC Characteristics	23
CHAPTER 7 PACKAGE DIMENSION	24
CHAPTER 8 ORDERING INFORMATION	25

List of Figures

Figure 3.1 - GL854G 64 Pin LQFP Pinout Diagram	8
Figure 4.1 - GL854G Block Diagram (Multiple TT).....	12
Figure 5.1 - LED Connection	14
Figure 5.2 - Operating in USB 1.1 Scheme	14
Figure 5.3 - Operating in USB 2.0 Scheme	15
Figure 5.4 - Power on Reset Diagram.....	16
Figure 5.5 - Power on Sequence of GL854G	16
Figure 5.6 - Timing of PGANG/SUSPND Strapping	17
Figure 5.7 - GANG Mode Setting	18
Figure 5.8 - SELF/BUS Power Setting	19
Figure 7.1 - GL854G 64 Pin LQFP Package.....	24

List of Tables

Table 3.1 - GL854G 64 Pin List	9
Table 3.2 - Pin Descriptions.....	9
Table 5.1 - Reset Timing	17
Table 6.1 - Maximum Ratings.....	20
Table 6.2 - Operating Ranges.....	20
Table 6.3 - DC Characteristics except USB Signals	20
Table 6.4 - DC Characteristics of USB Signals under FS/LS Mode	21
Table 6.5 - DC Characteristics of USB Signals under HS Mode	21
Table 6.6 - GL854G-1x power consumption	22
Table 6.7 - AC Characteristics of EEPROM Interface (24C02)	23
Table 8.1 - Ordering Information	25



CHAPTER 1 GENERAL DESCRIPTION

GL854G is Genesys Logic's premium 7-port hub solution which fully complies with Universal Serial Bus Specification Revision 2.0. GL854G implements multiple TT* (*Note 1*) architecture that provide dedicated TT* to each downstream (DS) ports, which guarantee Full-Speed(FS) data passing bandwidth when multiple FS device perform heavy loading operations. The controller inherits Genesys Logic's cutting edge technology on cost and power efficient serial interface design. GL854G has proven compatibility, lower power consumption figure and better cost structure above all USB 2.0 hub solutions worldwide.

GL854G implements multiple hub configuration features onto internal mask ROM, which traditionally requires external EEPROM. The microprocessor detects general purpose I/O (GPIO) status during the initial stage to configure hub settings such as (1) declare of compound device (2) gang/individual mode selection...etc. External EEPROM can be removed if no vendor specified PID/VID or product string is required for the application.

GL854G provides 12MHz clock output that can be used as a reference clock source for multi-chip, hub compound applications. The output clock provides enough driving capacity to support up to 2 devices that connected to the downstream port. The chip-to-chip clock trace is relatively sensitive to PCB noise. Please refers to design guide for PCB layout suggestions.

*Note 1: TT (transaction translator) is the main traffic control engine in an USB 2.0 hub to handle the unbalanced traffic speed between the upstream port and the downstream ports.

CHAPTER 2 FEATURES

- Multiple Chip Package (MCP) architecture
 - Integrates two standard USB 4-port hub silicon dies into single chip
 - Supports 7 USB 2.0 compliant downstream ports
- Multiple Transaction Translator (MTT)
 - Provides dedicated TT control logics for each downstream port
 - Superior performance when multiple FS devices operate concurrently
- Compliant with USB specification Revision 2.0
 - Upstream port supports both high-speed (HS) and full-speed (FS) traffic
 - Downstream ports support HS, FS, and low-speed (LS) traffic
 - Backward compatible to USB specification Revision 1.1
 - Each downstream port supports status indicator, with automatic and manual modes
 - Conform to self power and bus power requirements
- Integrated USB transceiver
 - Compliant with USB electrical requirements
 - Ultralow power consumption
 - Improve output drivers with slew-rate control for EMI reduction
 - Internal power-fail detection for ESD recovery
- On-chip 8-bit micro-processor
 - Support customized PID, VID by reading external EEPROM
 - Support downstream port configuration by reading external EEPROM
- Smart power management features
 - Support individual / gang mode over-current detection for all downstream ports
 - Automatic switching between self-powered and bus-powered modes
- Lower BOM cost
 - Single external 12 MHz crystal / Oscillator clock input
 - On-chip 5V to 3.3V power regulator
 - Built-in upstream port 1.5K Ω pull-up and downstream port 15K Ω pull-down resistors
 - Support low-cost 24C02 EEPROM
- Features for hub compound applications
 - Support compound-device (non-removable in downstream ports) by I/O pin configuration
 - Provide 12MHz clock source for other USB device connected to the downstream ports
- Available package type: 64 pin LQFP package (7x7mm)
- Applications:
 - UMPC/MID, motherboard on-board applications
 - Consumer electronics built-in hub application
 - Monitor built-in hub
 - Embedded systems
 - Hub compound applications

CHAPTER 3 PIN ASSIGNMENT

3.1 Pinouts

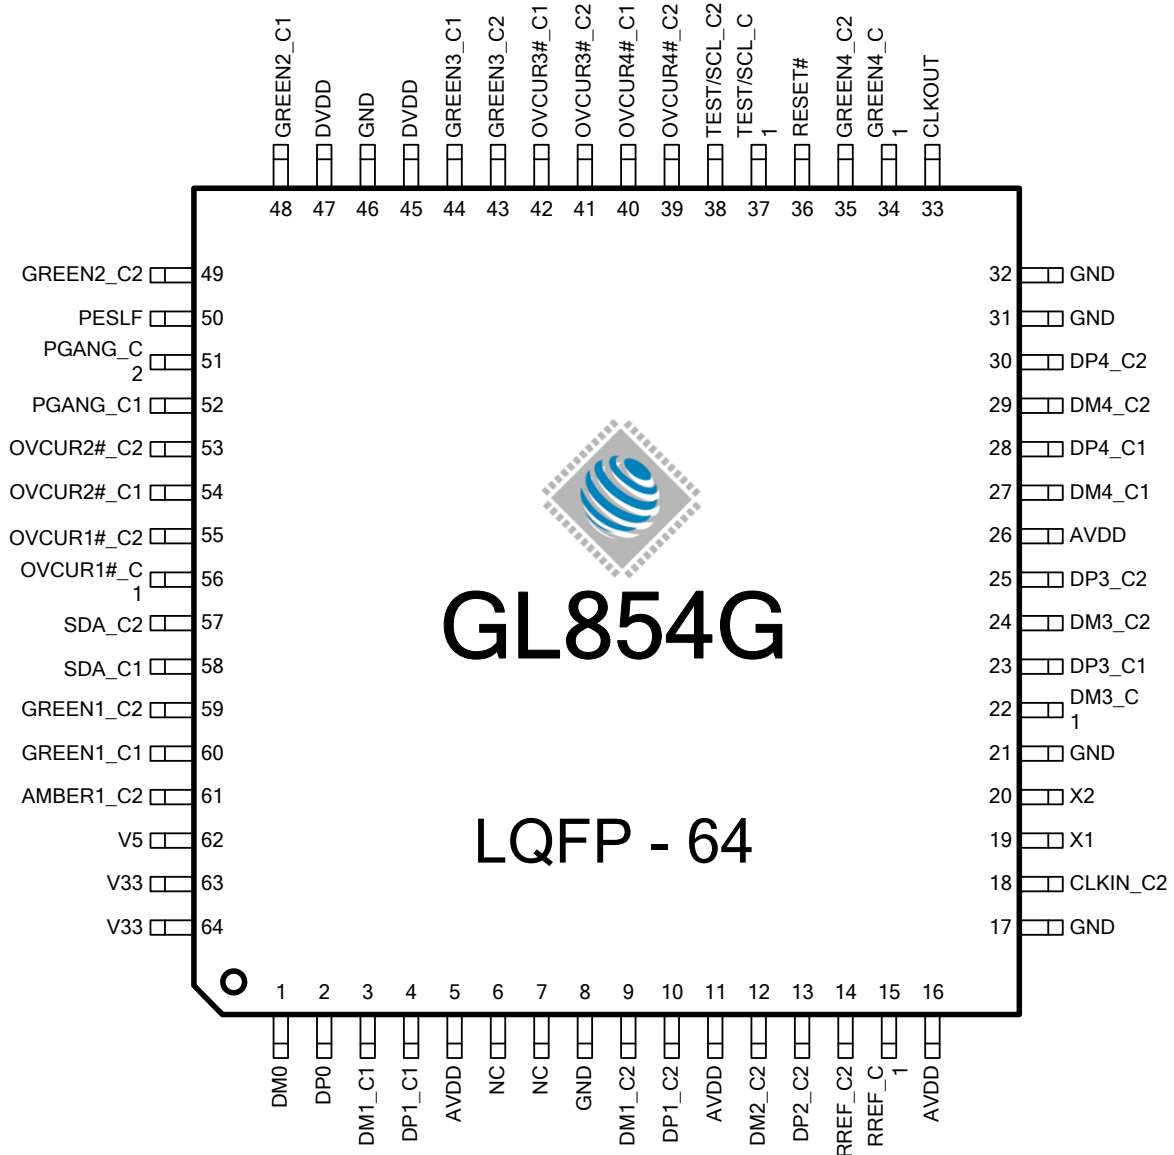


Figure 3.1 - GL854G 64 Pin LQFP Pinout Diagram

3.2 Pin List

Table 3.1 - GL854G 64 Pin List

Pin#	Pin Name	Type	Pin#	Pin Name	Type	Pin#	Pin Name	Type	Pin#	Pin Name	Type
1	DM0	B	17	GND	P	33	CLKOUT	O	49	GREEN2_C2	B
2	DP0	B	18	CLKIN_C2	I	34	GREEN4_C1	B	50	PSELF	I_5V
3	DM1_C1	B	19	X1	I	35	GREEN4_C2	B	51	PGANG_C2	B
4	DP1_C1	B	20	X2	O	36	RESET#	I_5V	52	PGANG_C1	B
5	AVDD	P	21	GND	P	37	TEST/SCL_C1	B	53	OVCUR2#_C2	I_5V
6	NC	-	22	DM3_C1	B	38	TEST/SCL_C2	B	54	OVCUR2#_C1	I_5V
7	NC	-	23	DP3_C1	B	39	OVCUR4#_C2	I_5V	55	OVCUR1#_C2	I_5V
8	GND	P	24	DM3_C2	B	40	OVCUR4#_C1	I_5V	56	OVCUR1#_C1	I_5V
9	DM1_C2	B	25	DP3_C2	B	41	OVCUR3#_C2	I_5V	57	SDA_C2	B
10	DP1_C2	B	26	AVDD	P	42	OVCUR3#_C1	I_5V	58	SDA_C1	B
11	AVDD	P	27	DM4_C1	B	43	GREEN3_C2	B	59	GREEN1_C2	B
12	DM2_C2	B	28	DP4_C1	B	44	GREEN3_C1	B	60	GREEN1_C1	B
13	DP2_C2	B	29	DM4_C2	B	45	DVDD	P	61	AMBER1_C2	B
14	RREF_C2	A	30	DP4_C2	B	46	GND	P	62	V5	P/I
15	RREF_C1	A	31	GND	P	47	DVDD	P	63	V33	P/O
16	AVDD	P	32	GND	P	48	GREEN2_C1	B	64	V33	P/O

3.3 Pin Descriptions

Table 3.2 - Pin Descriptions

USB Interface			
Pin Name	GL854G-1x 64 Pin#	I/O Type	Description
DM0 DP0	1,2	B	USB signals for USPORT
DM1_C1 DP1_C1	3,4	B	USB signals for DSPORT1 of 1-tier hub
DM3_C1 DP3_C1	22,23	B	USB signals for DSPORT3 of 1-tier hub
DM4_C1 DP4_C1	27,28	B	USB signals for DSPORT4 of 1-tier hub
DM1_C2 DP1_C2	9,10	B	USB signals for DSPORT1 of 2-tier hub
DM2_C2 DP2_C2	12,13	B	USB signals for DSPORT2 of 2-tier hub

DM3_C2 DP3_C2	24,25	B	USB signals for DSPORT3 of 2-tier hub
DM4_C2 DP4_C2	29,30	B	USB signals for DSPORT4 of 2-tier hub
RREF_C1 RREF_C2	15,14	A	Ref. resistor for 1-tier and 2-tier hub. (C1=1-tier, C2=2-tier) Resistor value of 680Ω should be connected between RREF pin and ground (GND).

Note: USB signals must be carefully handled in PCB routing. For detailed information, please refer to **USB 2.0 Hub Design Guide**.

Hub Interface			
Pin Name	GL854G-1x	I/O Type	Description
	64 Pin#		
OVCUR1#~4#_C1	56,54, 42,40	I_5V (pu)	Active low. Over current indicator for 1-tier hub's DSPORT1~4 OVCUR1# is the only over current flag for GANG mode.
OVCUR1#~4#_C2	55,53, 41,39	I_5V (pu)	Active low. Over current indicator for 2-tier hub's DSPORT1~4 OVCUR1# is the only over current flag for GANG mode.
GREEN1~4_C1	60,48, 44,34	B (pd)	Green LED indicator for 1-tier hub's DSPORT1~4 (Output mode) Strapping pin for DSPORT non-removable configuration. (Input mode) Details please check Chapter 5, sec. 5.2
GREEN1~4_C2	59,49, 43,35	B (pd)	Green LED indicator for 2-tier hub's DSPORT1~4 Strapping pin for DSPORT non-removable configuration. * Details please check: Chapter 5, sec. 5.2
PSELF	50	I_5V (pu)	Self-powered detection for 1-tier and 2-tier hub. * PSELF should be pull-high concurrently
PGANG_C1 PGANG_C2	52 51	B	Strapping pin for gang / individual mode selection. (input mode) Host Suspend notification output pin (output mode) Gang input:1, output: 0@normal, 1@suspend Individual input:0, output: 1@normal, 0@suspend * Details please check: Chapter 5, 5.2

Others Interface			
Pin Name	GL854G-1x	I/O Type	Description
	64 Pin#		
X1	19	I	Crystal / OSC clock input (for 1-tier hub)
X2	20	O	Crystal clock output. (for 1-tier hub)
CLKOUT	33	O	On-chip PLL output (12MHz output)
CLKIN_C2	18	I	OSC clock input (for 2-tier hub)
RESET#	36	I_5V	Active low. External reset input, default pull high 10KΩ When RESET# = low, whole chip is reset to the initial state
TEST/SCL_C1 SDA_C1	37, 58	B	I2C EEPROM interface for 1-tier hub *TEST/SCL pin cannot pull-high during initial stage to prevent hub get into test mode
TEST/SCL_C2 SDA_C2	38, 57	B	I2C EEPROM interface for 2-tier hub *TEST/SCL pin cannot pull-high during initial stage to prevent hub get into test mode
NC	6,7	-	Reserved *Not connected

Power / Ground			
Pin Name	GL854G-1x	I/O Type	Description
	64 Pin#		
AVDD	5,11,16, 26	P	3.3V analog power input for analog circuits.
DVDD	45,47	P	3.3V digital power input for digital circuits
GND	8,17,21,31, 32,46,	P	Ground
V5	62	P/I	5V Power input. It need be NC if using external regulator
V33	63,64	P/O	5V-to-3.3V regulator Vout & 3.3 input

*Note: Analog circuits are quite sensitive to power and ground noise. PCB layout must take care the power routing and the ground plane. For detailed information, please refer to **USB 2.0 Hub Design Guide**.

Notation:

Type	O	Output
	I	Input
	I_5V	Input_5V tolerance
	B	Bi-directional
	P	Power / Ground
	pu	Internal pull up
	pd	Internal pull down
	P/I	Power input
	P/O	Power output

CHAPTER 4 BLOCK DIAGRAM

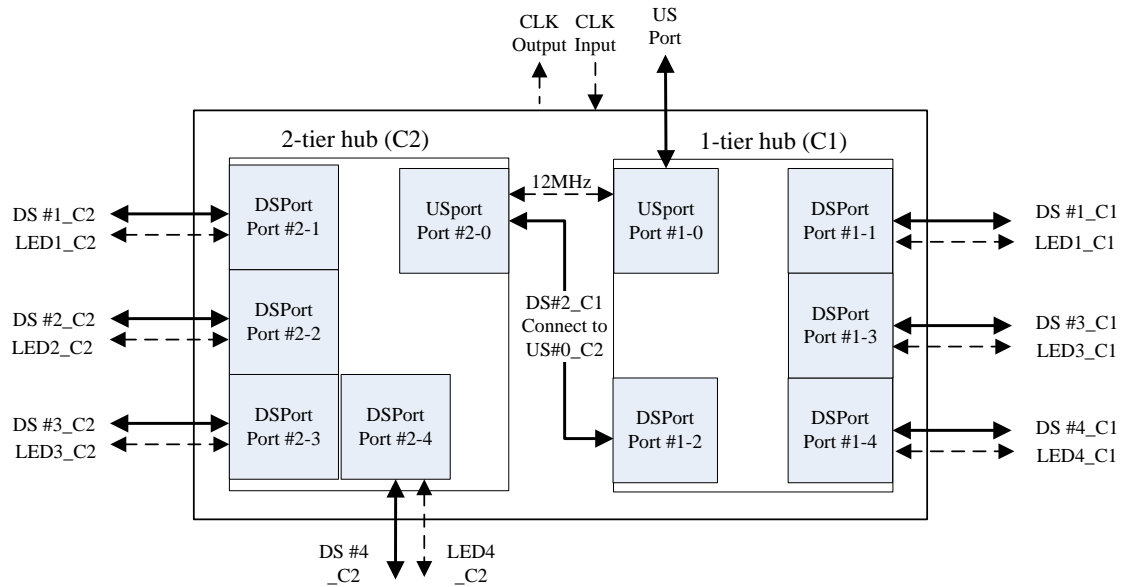


Figure 4.1 - GL854G Block Diagram (Multiple TT)

CHAPTER 5 FUNCTION DESCRIPTION

5.1 General Hub Functions

5.1.1 MCP Architecture

GL854G leverages multi-chip package (MCP) technology that incorporates two USB 4-port hubs onto a standard 7x7mm 64 pin LQFP package to provide 7 downstream ports that fully compliant to USB 2.0 specifications. The 1-tier hub's PLL integrates on-chip clock output for 2-tier hub's reference clock, therefore, only one external 12MHz crystal is required for GL854G whole chip operation.

5.1.2 USB Transceiver

USB transceiver is the analog circuit to support USB electrical requirements. GL854G integrated all USPORT (upstream port) and DSPORT (downstream port) transceivers into single chip.

USPORT supports both full-speed and high-speed electrical characteristics defined in chapter 7 of USB specification Revision 2.0. USPORT transceiver will operate in full-speed electrical signaling when GL854G is plugged into a 1.1 host/hub. USPORT transceiver will operate in high-speed electrical signaling when GL854G is plugged into a 2.0 host/hub.

DSPORT supports high-speed, full-speed, and low-speed electrical characteristics defined in chapter 7 of USB specification Revision 2.0. In addition, each DSPORT transceiver accurately controls its own squelch level to detect the detachment and attachment of devices.

5.1.3 Multiple-TT Architecture

Transaction Translator (TT) implements the control logic defined in section 11.14 ~ 11.22 of USB specification Revision 2.0. TT basically handles the unbalanced traffic speed between the USPORT (operating in HS) and DSPORTS (operating in FS/LS) of hub. GL854G implements multiple-TT architecture that provide dedicated TT and control logic to each downstream (DS) ports, which guarantee Full-Speed(FS) data passing bandwidth when multiple FS device perform heavy loading operations.

5.1.4 Port Power Control

An USB hub is required to report DSPORT power status to host in case of any over-current event occurs. GL854G can support either individual mode or gang mode over-current detection scheme. (Please check 5.2.2 for gang/individual mode configuration) For individual mode, one DSPORT over-current event does not affect other ports. The OVCUR# pin corresponding to each downstream port should be connected to a power fuse with 500mA+ max current tolerance. For gang mode, multiple ports share the same power protection circuit. For 7-port application, there are two options to gang power fuse: (1) One 1.5A+ power fuse for 1-tier hub DSPORT (port2~4_C1) and One 2A+ power fuse for 2-tier (port1~4_C2).

5.1.5 Port Indicator

GL854G controls the LED lighting according to the flow defined in section 11.5.3 of Universal Serial Bus Specification Revision 2.0. Both manual mode and Automatic mode are supported in GL854G. When GL854G is globally suspended, GL854G will turn off the LED to save power.

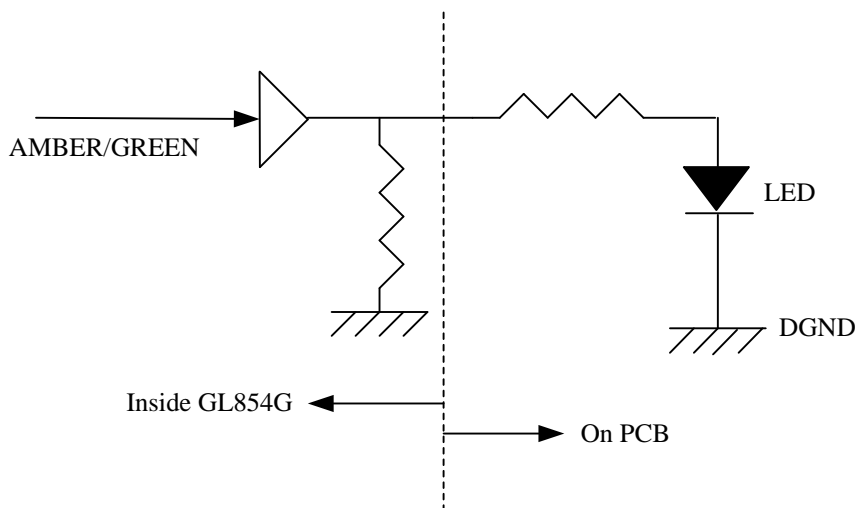


Figure 5.1 - LED Connection

5.1.6 Operation Scheme

5.1.6.1 Connected to USB 1.1 Host/Hub

If an USB 2.0 hub is connected to the downstream port of an USB 1.1 host/hub, it will operate in USB 1.1 mode. For an USB 1.1 hub, both upstream direction traffic and downstream direction traffic are passing through REPEATER. That is, the REPEATER/TT routing logic will route the traffic channel to the REPEATER.

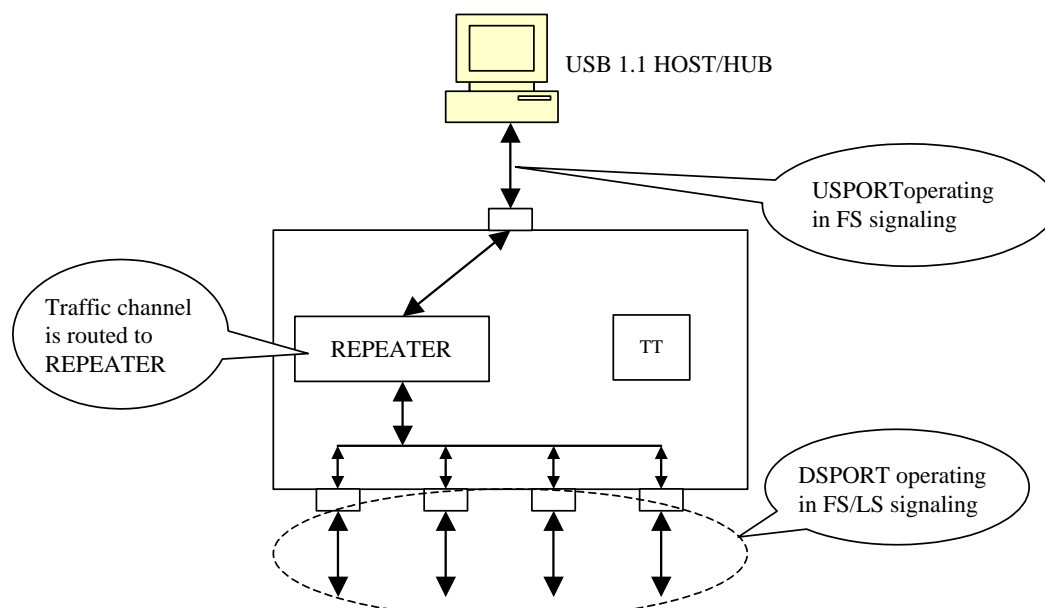


Figure 5.2 - Operating in USB 1.1 Scheme

5.1.6.2 Connected to USB 2.0 Host/Hub

If an USB 2.0 hub is connected to an USB 2.0 host/hub, it will operate in USB 2.0 mode. The upstream port signaling is in high speed with bandwidth of 480 Mbps under this environment. The traffic channel will then be routed to the REPEATER when the device connected to the downstream port is signaling also in high speed. On the other hand, the traffic channel will then be routed to TT when the device connected to the downstream port is signaling in full/low speed.

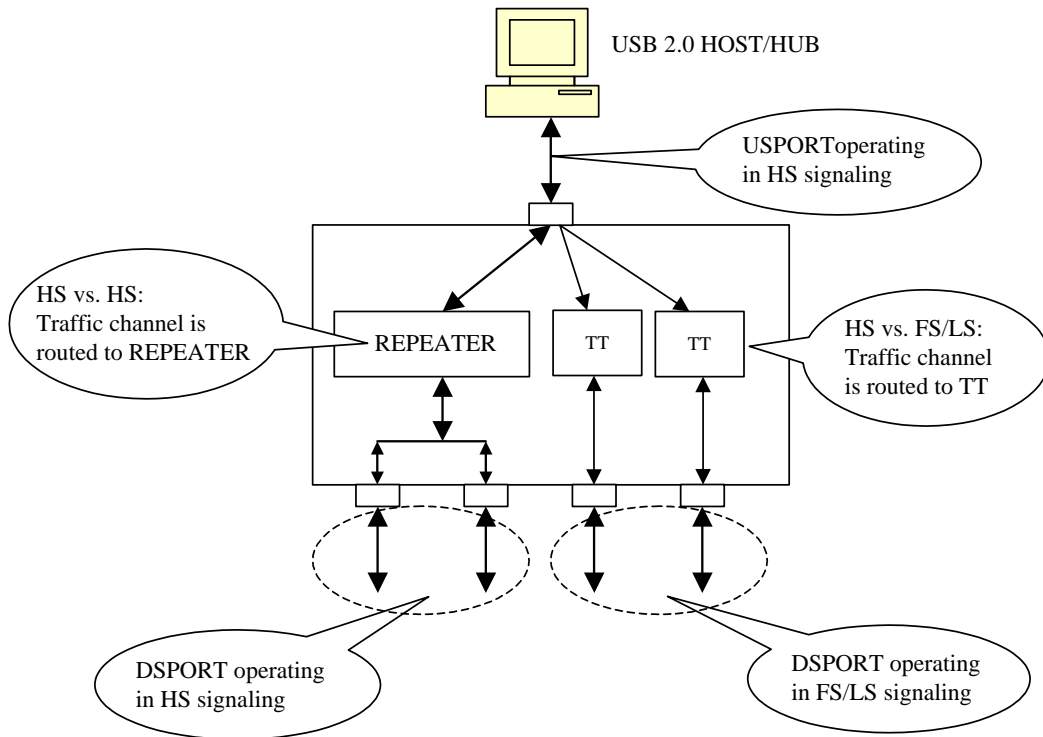


Figure 5.3 - Operating in USB 2.0 Scheme

5.2 Configuration and I/O Settings

5.2.1 RESET Setting

GL854G's power on reset can either be triggered by external reset or internal power good reset circuit. The external reset pin, RESETJ, is connected to upstream port Vbus (5V) to sense the USB plug / unplug or 5V voltage drop. The reset trigger voltage can be set by adjusting the value of resistor R1 and R2 (Suggested value refers to schematics) GL854G's internal reset is designed to monitor silicon's internal core power (3.3V) and initiate reset when unstable power event occurs. The power on sequence will start after the power good voltage has been met, and the reset will be released after approximately 2.7 μ S after power good. GL854G's reset circuit as depicted in the picture.

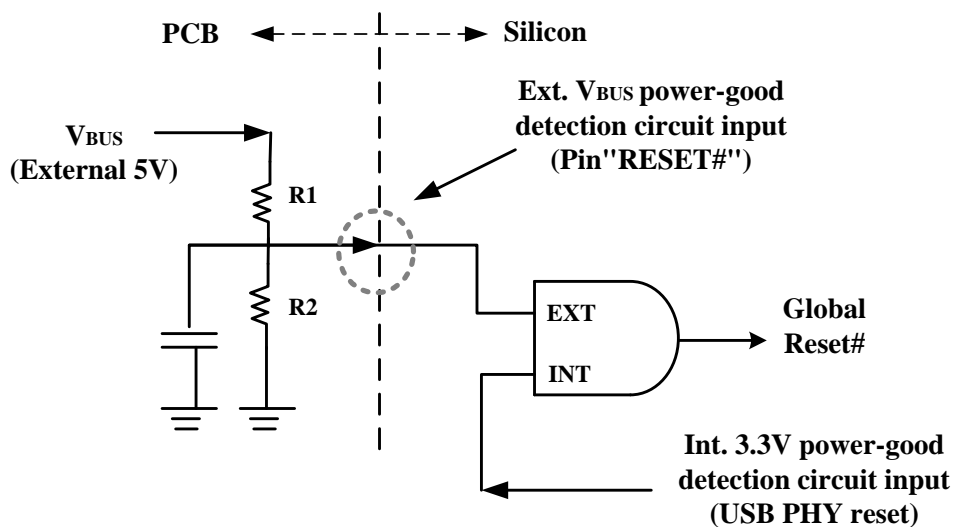


Figure 5.4 - Power on Reset Diagram

To fully control the reset process of GL854G, we suggest the reset time applied in the external reset circuit should longer than that of the internal reset circuit. Timing of POR is illustrated as below figure.

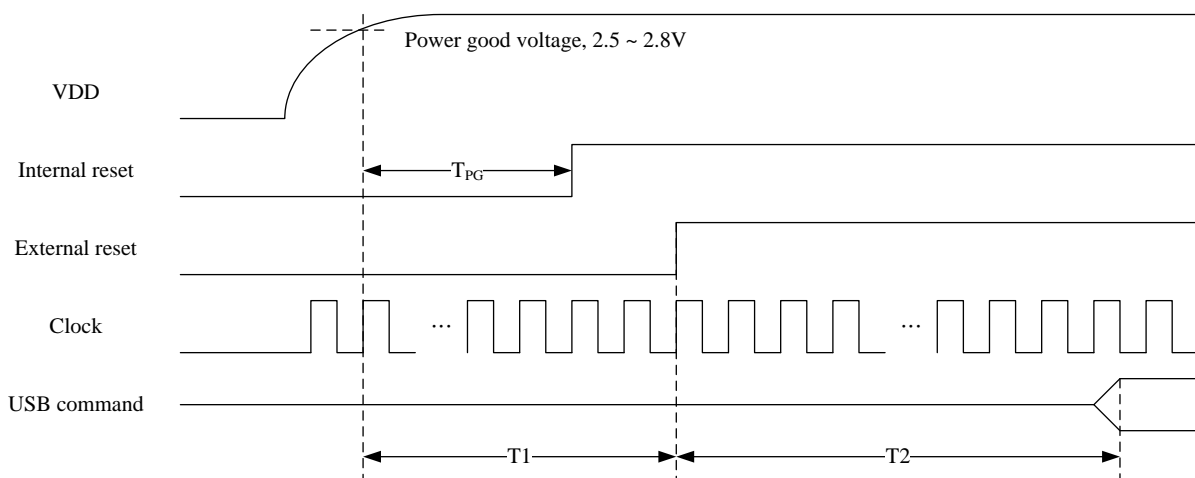


Figure 5.5 - Power on Sequence of GL854G

Table 5.1 - Reset Timing

Symbol	Parameter	Min.	Max.	Unit
T _{PG}	VDD power up to internal reset (power good) assert (12MHz)	-	2.7	μs
T1	VDD power up to external reset (RESETJ) assert	3	-	μs
T2	RESET assert to respond USB command ready	70	-	ms

To fully control the reset process of GL854G, we suggest the reset time applied in the external reset circuit should longer than that of the internal reset circuit.

5.2.2 PGANG/SUSPND Setting

To save pin count, GL854G uses the same pin to decide individual/gang mode as well as to output the suspend flag. The individual/gang mode is decided within 20us after power on reset. Then, about 50ms later, this pin is changed to output mode (as indicated in Figure 5.6). GL854G outputs the suspend flag once it is globally suspended. To setup individual mode, a pull-down resistor should be placed, while gang mode on the contrary requires a pull high resistor. The resistor value should be greater than 100KΩ. Figure 5.7 illustrate gang strapping and suspend LED indicator reference schematics. It should be noticed that the polarity of LED must be followed to prevent unwanted driving during host suspend.

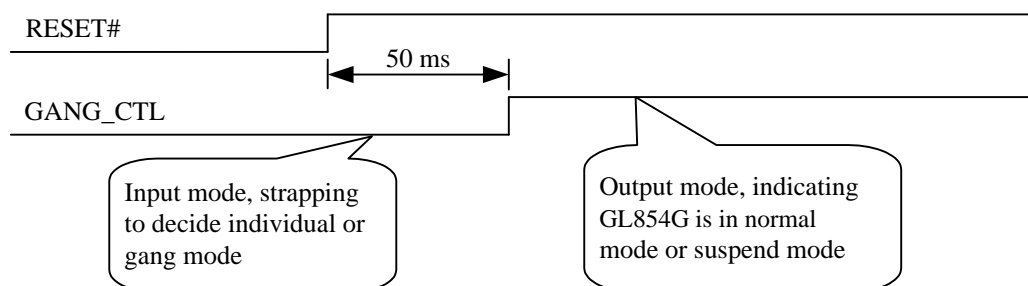


Figure 5.6 - Timing of PGANG/SUSPND Strapping

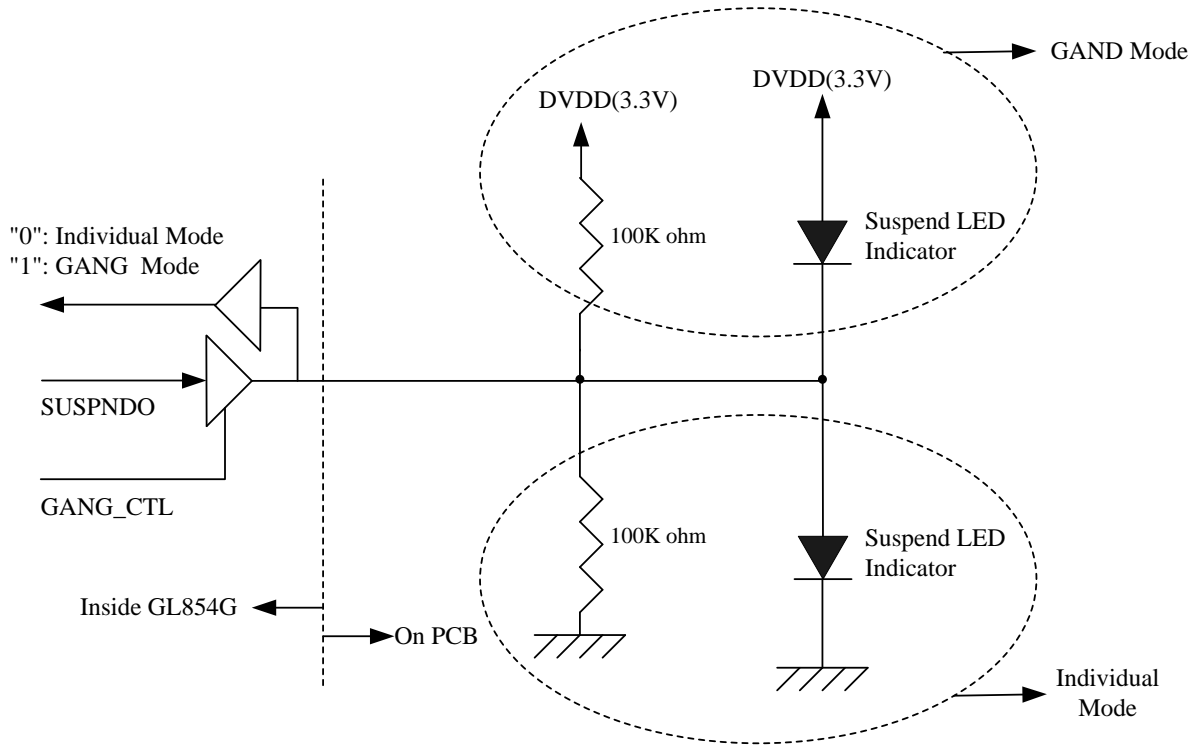


Figure 5.7 - GANG Mode Setting

5.2.3 Power Control

GL854G targets 7-DSport hub application. It can only operate under self-power mode due to USport Vbus maximum power supply (500mA) is not enough to support 7 DSport operate concurrently (100/500mA per port x 7). To configure 1-tier and 2-tier hub into self-power mode, PSELF pin must be configured as a self-power hub (pull-high). Please check GL854G reference schematics for additional information.

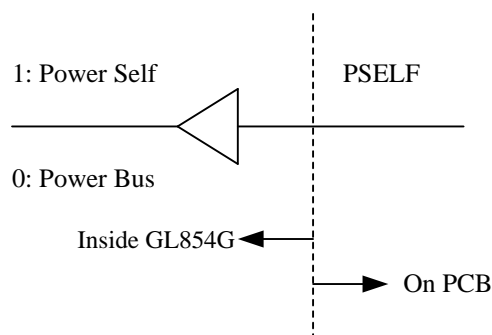


Figure 5.8 - SELF/BUS Power Setting

5.2.4 Non-removable Port Configuration

For compound application or embedded system, downstream ports that always connected inside the system can be set as non-removable based on the state of corresponding status LED, pin GREEN2~4_C1 and GREEN1~4_C2. If the pin is pulled high in the initial stage, the corresponding port will be set as non-removable.

5.2.5 EEPROM Setting

GL854G provides flexibility to reply host with customer oriented PID/VID or desired hub settings through a low-cost 24C02 EEPROM. GL854G verifies the check sum after power on reset to make sure EEPROM content follows Genesys required format. If the check sum is correct, GL854G will take the configuration table that stored in EEPROM as part of the descriptor contents. In absence of external EEPROM, GL854G replies to host commands by the default settings in the internal ROM. The detail setting information please refers to the **USB 2.0 Hub AP Note_EEPROM Info** document.

CHAPTER 6 ELECTRICAL CHARACTERISTICS

6.1 Maximum Ratings

Table 6.1 - Maximum Ratings

Symbol	Parameter	Min.	Max.	Unit
V _{CC}	Power Supply	4.75	5.25	V
V _{IN}	Input Voltage for digital I/O(EE_DO) pins	-0.5	+3.6	V
V _{IN}	Input Voltage for digital I/O(Ovcur1-4,Pself,Reset) pins	-0.5	+5.5	V
V _{INUSB}	Input Voltage for USB signal (DP, DM) pins	-0.5	+3.6	V
T _S	Storage Temperature under bias	-60	+100	°C
F _{OSC}	Frequency	12 MHz ± 0.05%		

6.2 Operating Ranges

Table 6.2 - Operating Ranges

Symbol	Parameter	Min.	Typ.	Max.	Unit
V ₅	5V Power Supply	4.75	5.0	5.25	V
V _{DD}	3.3V Power Supply	3.0	3.3	3.6	V
V _{IND}	Input Voltage for digital I/O pins	-0.5	3.3	3.6	V
V _{INUSB}	Input Voltage for USB signal (DP, DM) pins	0.5	3.3	3.6	V
T _A	Ambient Temperature	0	-	70	°C
T _J	Absolute maximum junction temperature	0	-	125	°C
θ _{JA}	Thermal Characteristics LQFP 64	-	185.18	-	°C/W

6.3 DC Characteristics

Table 6.3 - DC Characteristics except USB Signals

Symbol	Parameter	Min.	Typ.	Max.	Unit
P _D	Power Dissipation	490	-	980	mW
V _{DD}	Power Supply Voltage	3	3.3	3.6	V
V _{IL}	LOW level input voltage	-	-	0.8	V
V _{IH}	HIGH level input voltage	2.0	-	-	V
V _{TLH}	LOW to HIGH threshold voltage	1.4	1.5	1.6	V
V _{THL}	HIGH to LOW threshold voltage	0.87	0.94	0.99	V
V _{OL}	LOW level output voltage when I _{OL} =8mA	-	-	0.4	V
V _{OH}	HIGH level output voltage when I _{OH} =8mA	2.4	-	-	V
I _{OLK}	Leakage current for pads with internal pull up or pull down resistor	-	-	30	µA
R _{DN}	Pad internal pull down resistor	81K	103K	181K	Ω
R _{UP}	Pad internal pull up resistor	81K	103K	181K	Ω

Table 6.4 - DC Characteristics of USB Signals under FS/LS Mode

Symbol	Parameter	Min.	Typ.	Max.	Unit
V _{OL}	DP/DM static output LOW	0	-	0.3	V
V _{OH}	DP/DM static output HIGH	2.8	-	3.6	V
V _{DI}	Differential input sensitivity	0.2	-	-	V
V _{CM}	Differential common mode range	0.8	-	2.5	V
V _{SE}	Single-ended receiver threshold	0.2	-	-	V
C _{IN}	Transceiver capacitance	-	-	20	pF
I _{LO}	Hi-Z state data line leakage	-10	-	+10	μA
Z _{DRV}	Driver output resistance	28	-	44	Ω

Table 6.5 - DC Characteristics of USB Signals under HS Mode

Symbol	Parameter	Min.	Typ.	Max.	Unit
V _{OL}	DP/DM static output LOW	-	-	0.1	V
C _{IN}	Transceiver capacitance	4	4.5	5	pF
I _{LO}	Hi-Z state data line leakage	-5	0	+5	μA
Z _{DRV}	Driver output resistance for USB 2.0 HS	48	45	42	Ω

6.4 Power Consumption


Table 6.6 - GL854G-1x power consumption

Symbol	Condition			Current	Unit
	Active ports	Host	Device		
I_{SUSP}	Suspend			1.5	mA
I_{CC}	7	H	H	144.3	mA
	6	H	H	136.3	mA
	5	H	H	127.5	mA
	4	H	H	120.8	mA
	3	H	H	113.9	mA
	2	H	H	106.3	mA
	1	H	H	97.6	mA
	Up Port Config	H	N/A	88.9	mA


*: H: High-Speed

6.5 AC Characteristics

GL854G- supports 24C02 type EEPROM for customized VID/PID or hub configuration settings. AC characteristics of 24C02 interface summarized as below figures and tables.

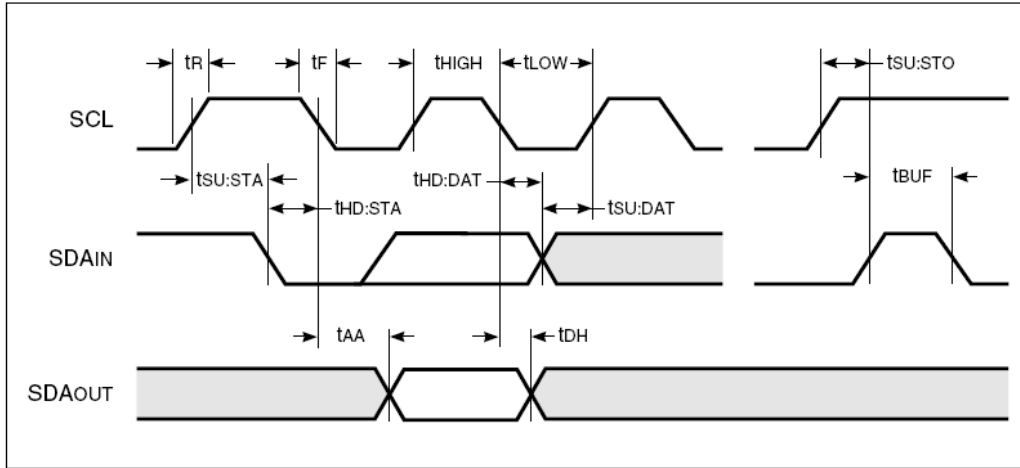

Bus Timing

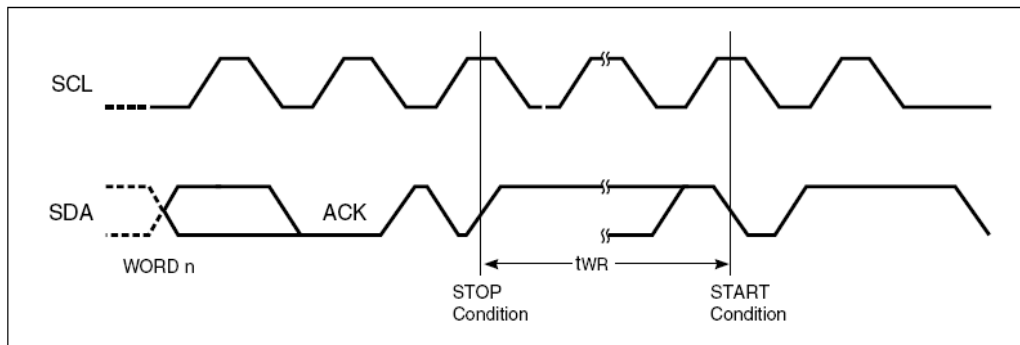

Write Cycle Timing

Table 6.7 - AC Characteristics of EEPROM Interface (24C02)

Symbol	Parameter	Test Conditions	1.8V-5.5V		2.5V-5.5V		Unit
			Min.	Max.	Min.	Max.	
f _{SCL}	SCL Clock Frequency		0	100	0	400	KHz
T	Noise Suppression Time ⁽¹⁾		—	100	—	50	ns
t _{LOW}	Clock LOW Period		4.7	—	1.2	—	µs
t _{HIGH}	Clock HIGH Period		4	—	0.6	—	µs
t _{BUF}	Bus Free Time Before New Transmission ⁽¹⁾		4.7	—	1.2	—	µs
t _{SU:STA}	Start Condition Setup Time		4.7	—	0.6	—	µs
t _{SU:STO}	Stop Condition Setup Time		4.7	—	0.6	—	µs
t _{HD:STA}	Start Condition Hold Time		4	—	0.6	—	µs
t _{HD:STO}	Stop Condition Hold Time		4	—	0.6	—	µs
t _{SU:DAT}	Data In Setup Time		200	—	100	—	ns
t _{HD:DAT}	Data In Hold Time		0	—	0	—	ns
t _{DH}	Data Out Hold Time	SCL LOW to SDA Data Out Change	100	—	50	—	ns
t _{AA}	Clock to Output	SCL LOW to SDA Data Out Valid	0.1	4.5	0.1	0.9	µs
t _R	SCL and SDA Rise Time ⁽¹⁾		—	1000	—	300	ns
t _F	SCL and SDA Fall Time ⁽¹⁾		—	300	—	300	ns
t _{WR}	Write Cycle Time		—	10	—	5	ms

Note:

1. This parameter is characterized but not 100% tested.

CHAPTER 7 PACKAGE DIMENSION

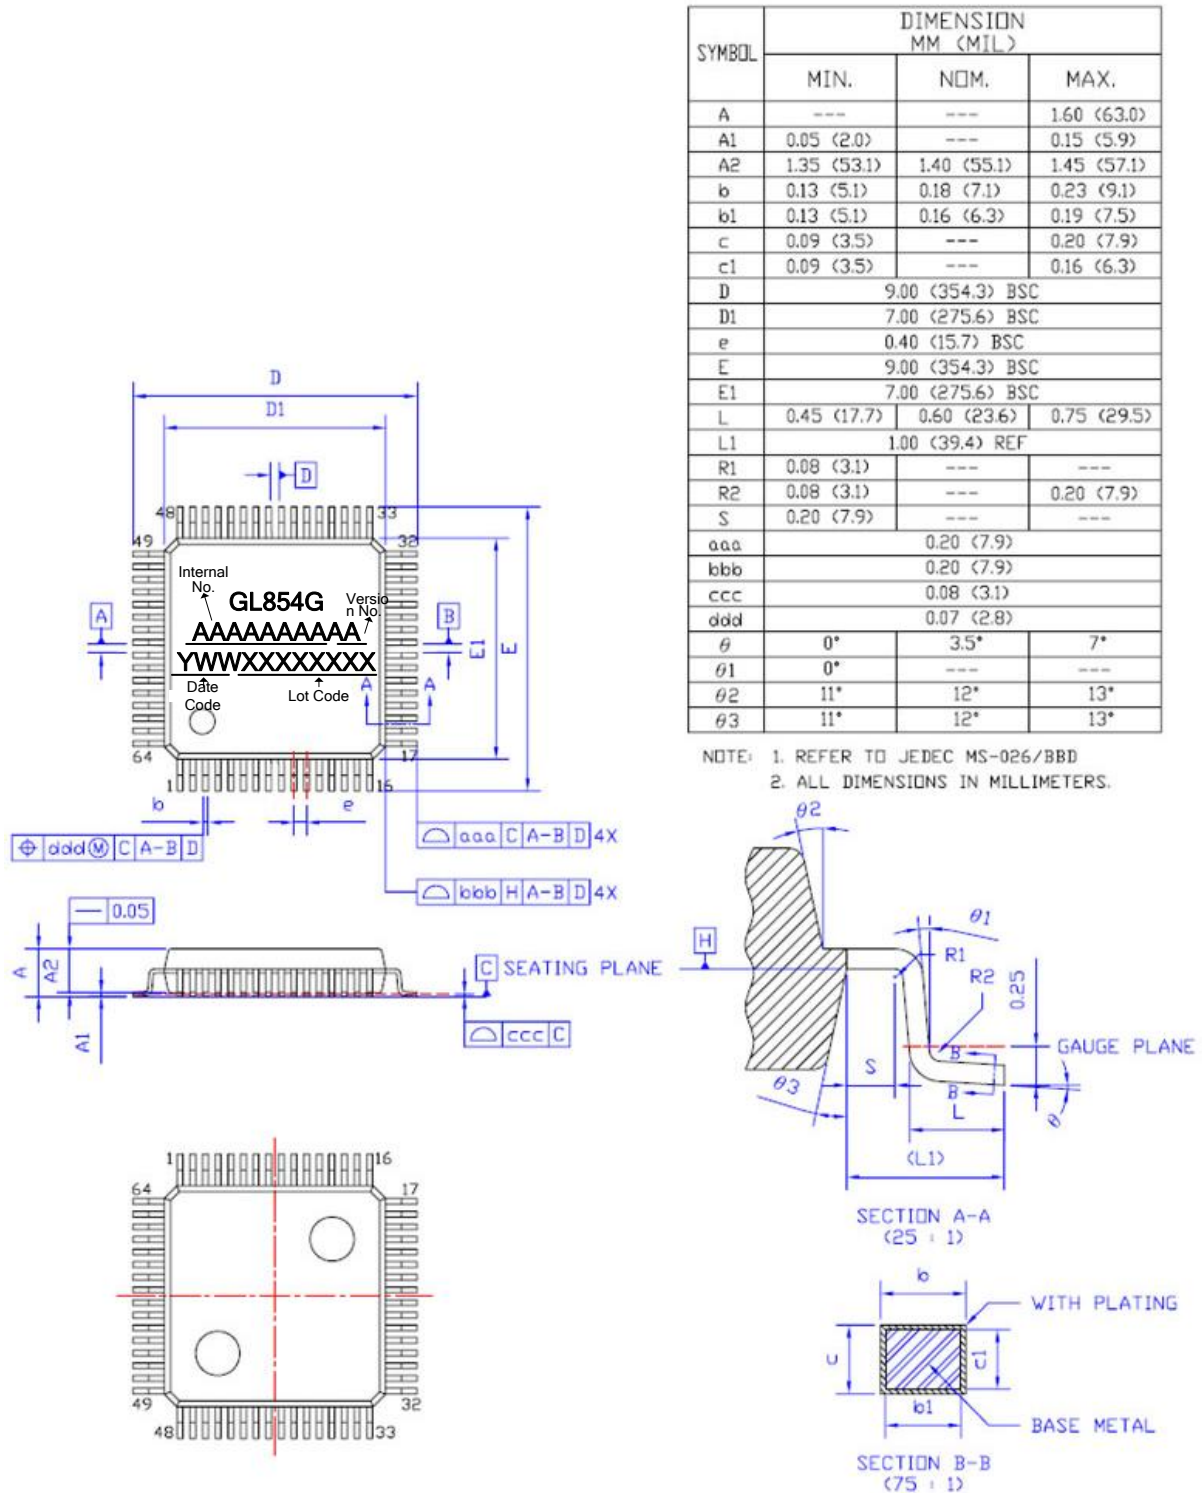


Figure 7.1 - GL854G 64 Pin LQFP Package

CHAPTER 8 ORDERING INFORMATION

Table 8.1 - Ordering Information

Part Number	Package	Green/Wire Material	Version	Status
GL854G -MSGXX	LQFP 64	Green Package	XX	Available