

SANYO

No.2277A

LA3607

7-Band Graphic Equalizer

Features

- . 7-band graphic equalizer for one channel can be formed easily by externally connecting capacitors and variable resistors which fix fo (resonance frequency).
- . Series connection of the LA3607 makes multiband available.
- . Boost, cut amount can be varied by external resistors.
- . Highly stable to capacitive load

Maximum Ratings at Ta=25°C

			unit
Maximum Supply Voltage	V _{CCmax}	20	V
Allowable Power Dissipation	P _{dmax}	300	mW
Operating Temperature	T _{opr}	-20 to +75	°C
Storage Temperature	T _{stg}	-40 to +125	°C

Operating Conditions at Ta=25°C


			unit
Recommended Supply Voltage	V _{CC}	8	V
Operating Voltage Range	V _{CCop}	5 to 15	V

Operating Characteristics at Ta=25°C, V_{CC}=8V, R_L=10kohms, R_g=600ohms,

		See specified Test Circuit.	min	typ	max	unit	
Quiescent Current	I _{cco}	Quiescent		7	9	mA	
Voltage Gain	VG	f=1kHz, V _{IN} =-10dB at all flat mode	-3.8	-0.8	2.2	dB	
Boost Amount	BOOST	f=60Hz	Vo=-10dB is taken as 0dB at all flat mode at f=1kHz.	10	12	14	dB
		f=150Hz		10	12	14	dB
		f=400Hz		10	12	14	dB
		f=1kHz		10	12	14	dB
		f=2.5kHz		10	12	14	dB
		f=6kHz		10	12	14	dB
		f=15kHz		10	12	14	dB


Continued on next page.

Package Dimensions (unit: mm)
3021B

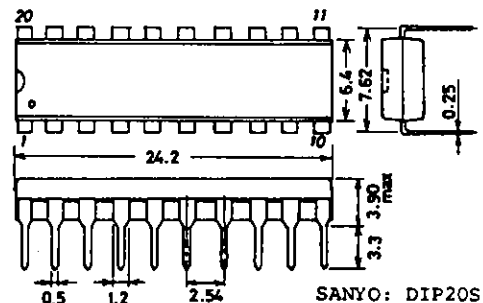

Continued from preceding page.

			min	typ	max	unit
Cut Amount	CUT	f=60Hz	-14	-12	-10	dB
		f=150Hz	-14	-12	-10	dB
		f=400Hz	-14	-12	-10	dB
		f=1kHz	-14	-12	-10	dB
		f=2.5kHz	-14	-12	-10	dB
		f=6kHz	-14	-12	-10	dB
		f=15kHz	-14	-12	-10	dB
Total Harmonic Distortion	THD	f=1kHz, Vo=1.0V at all flat mode input	0.02	0.1		%
Output Noise Voltage	V _{NO}	All flat, input short, B.P.F., 10Hz to 30kHz	7	40		µV

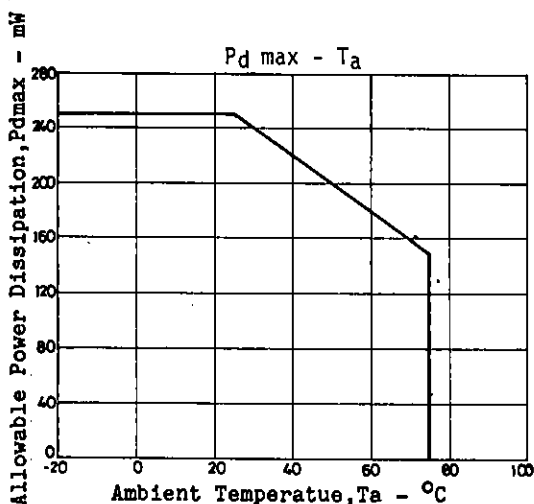


Test Method: V_{CC}=8V, R_L=10kohms, R_g=600ohms


Item	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	SW9	SW10	Conditions
I _{cco}	1	F	F	F	F	F	F	F	2	1	
V _G	2	F	F	F	F	F	F	F	1	1	f=1kHz V _{IN} =-10dB
B00ST1	2	B	F	F	F	F	F	F	1	1	f=60Hz
B00ST2	2	F	B	F	F	F	F	F	1	1	f=150Hz
B00ST3	2	F	F	B	F	F	F	F	1	1	f=400Hz
B00ST4	2	F	F	F	B	F	F	F	1	1	f=1kHz
B00ST5	2	F	F	F	F	B	F	F	1	1	f=2.5kHz
B00ST6	2	F	F	F	F	F	B	F	1	1	f=6kHz
B00ST7	2	F	F	F	F	F	F	B	1	1	f=15kHz
CUT1	2	C	F	F	F	F	F	F	1	1	f=60Hz
CUT2	2	F	C	F	F	F	F	F	1	1	f=150Hz
CUT3	2	F	F	C	F	F	F	F	1	1	f=400Hz
CUT4	2	F	F	F	C	F	F	F	1	1	f=1kHz
CUT5	2	F	F	F	F	C	F	F	1	1	f=2.5kHz
CUT6	2	F	F	F	F	F	C	F	1	1	f=6kHz
CUT7	2	F	F	F	F	F	F	C	1	1	f=15kHz
THD	2	F	F	F	F	F	F	F	1	1	f=1kHz, V _o =1.0V
V _{NO}	2	F	F	F	F	F	F	F	2	2	

LA3607


Test Circuit







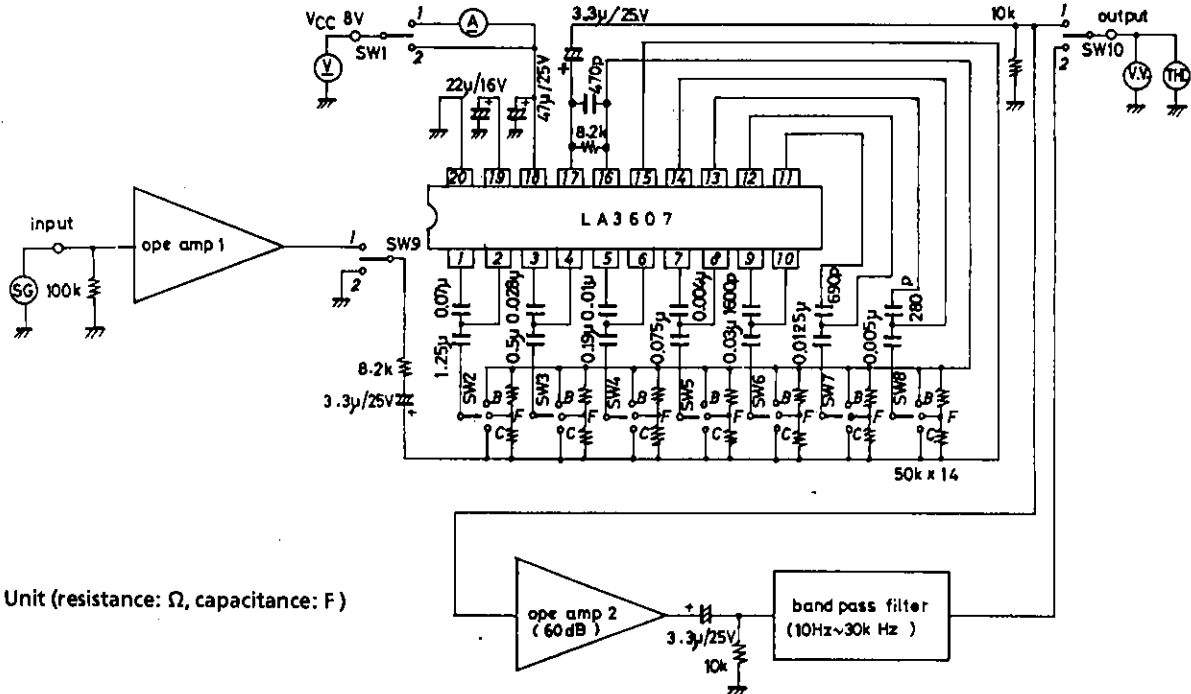



Equivalent Circuit Block Diagram

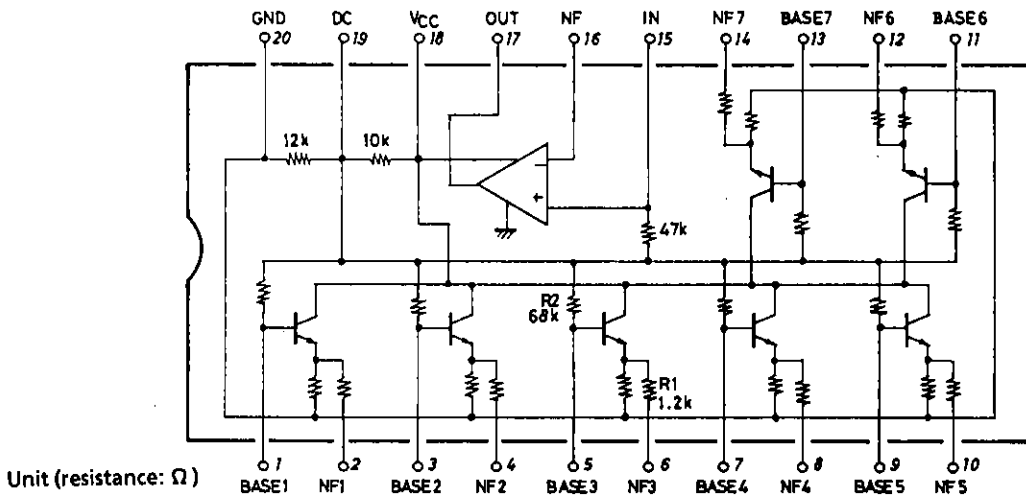

Sample Application Circuit

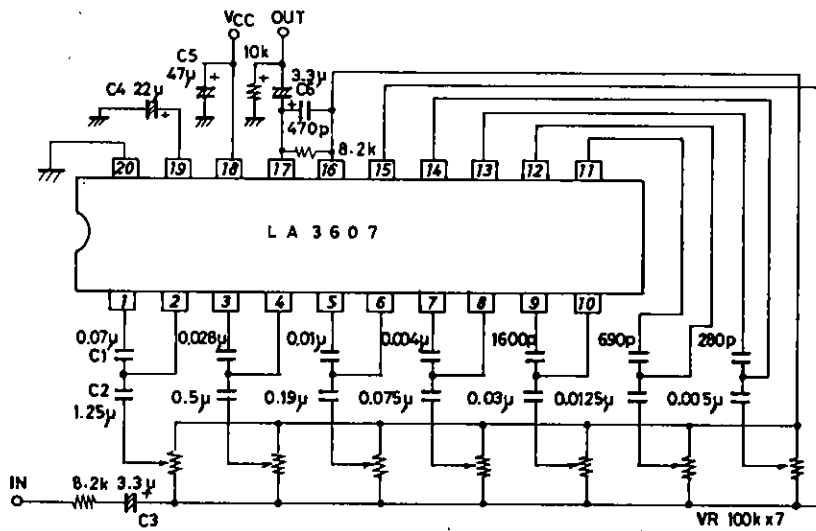

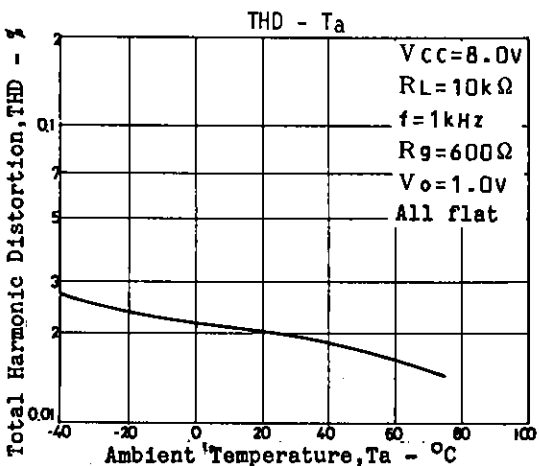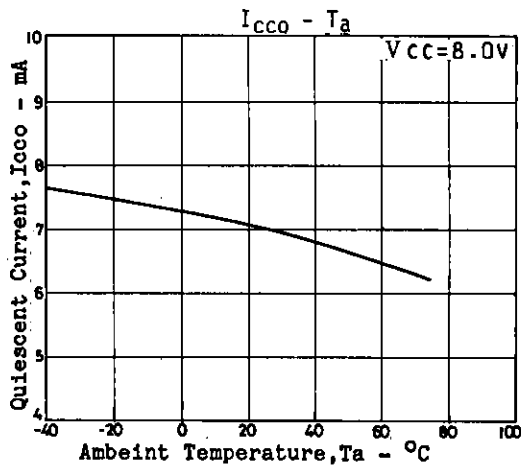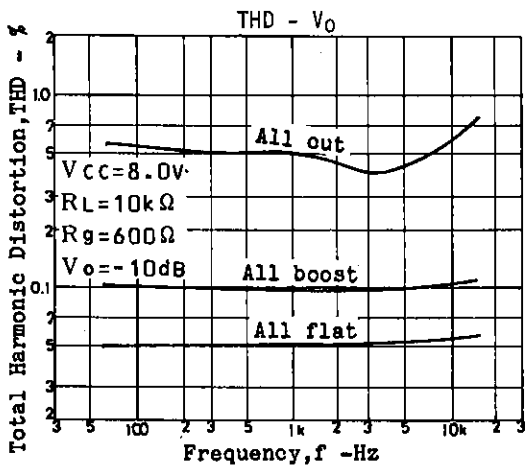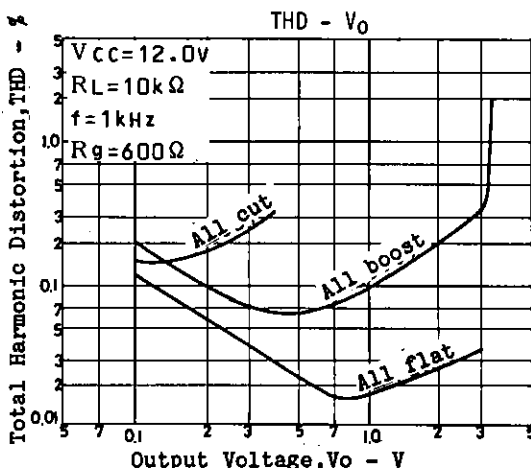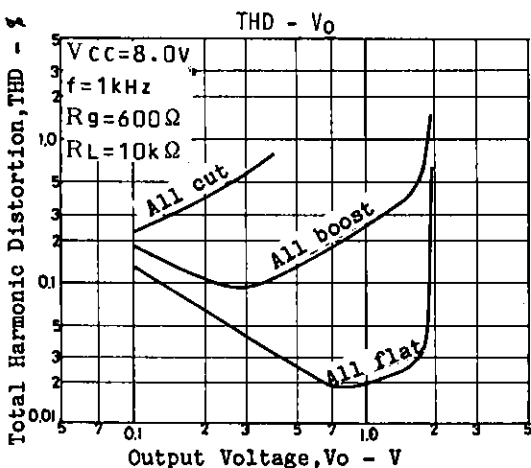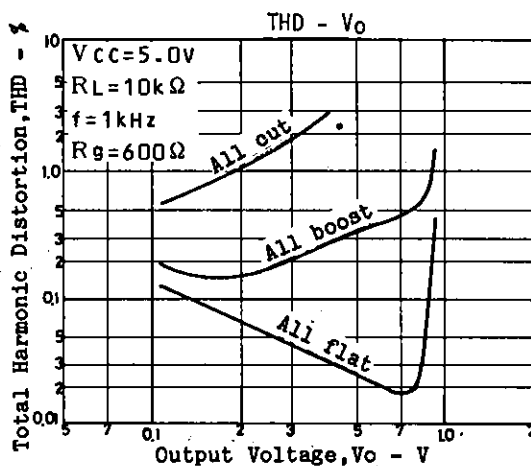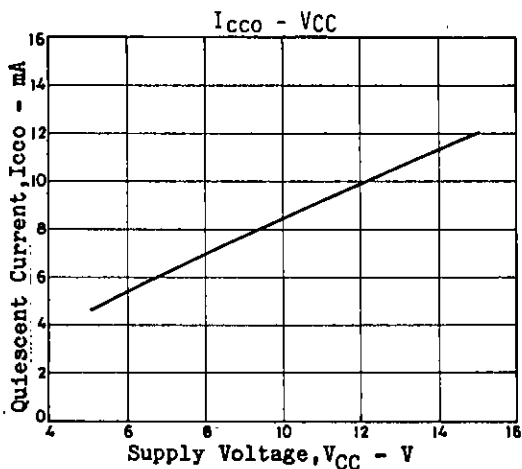

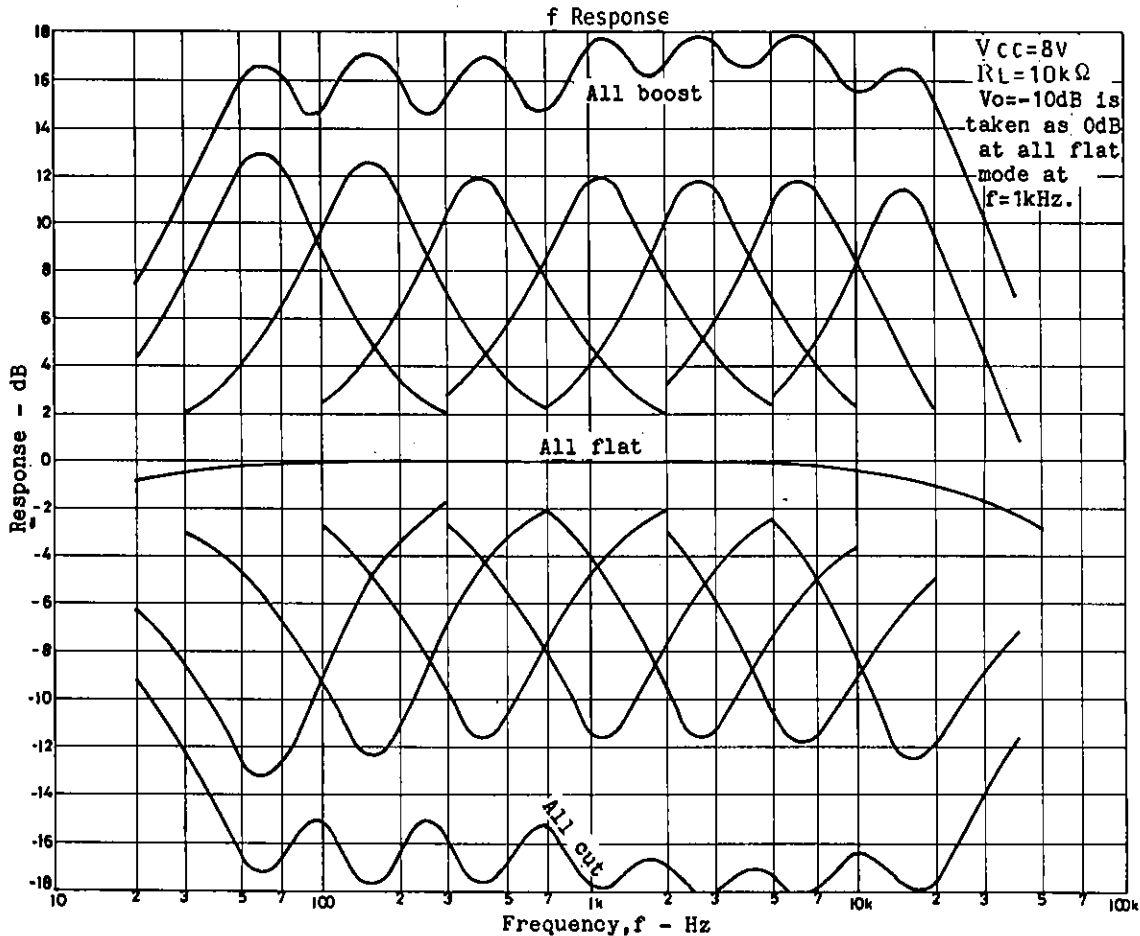

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.