



# 9001 Series




## DIN41612 Mating Introduce

---

2 Row insulator  
 B (Standard mounting)  
 Mounting axis  
 of the connector

3 Row insulator  
 C (Standard mounting)  
 Mounting axis  
 of the connector




Board lock available  
 L1=P.C.B. Thickness 1.6 ~2.0 mm  
 L2=P.C.B. Thickness 2.8 ~3.2 mm

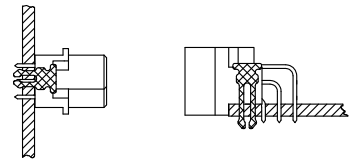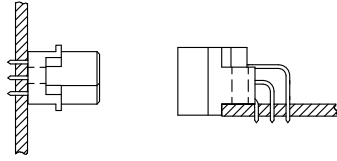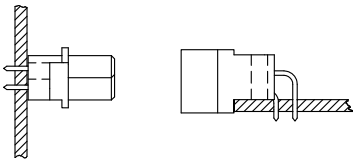

Q (Reverse mounting)  
 Mounting axis  
 of the connector

R (Reverse mounting)  
 Mounting axis  
 of the connector

Board lock available  
 L1=P.C.B. Thickness 1.6 ~2.0 mm  
 L2=P.C.B. Thickness 2.8 ~3.2 mm

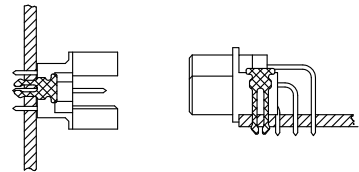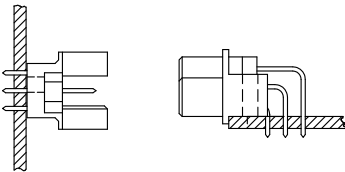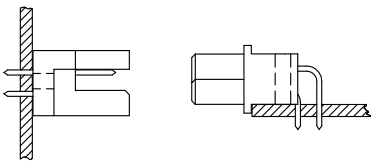

I.D.C. Type Ribbon Cable

Press Fit Type  
 2 Row insulator

3 Row insulator

2 Row insulator

3 Row insulator

