


9001 Series

DIN41612 B Type Female

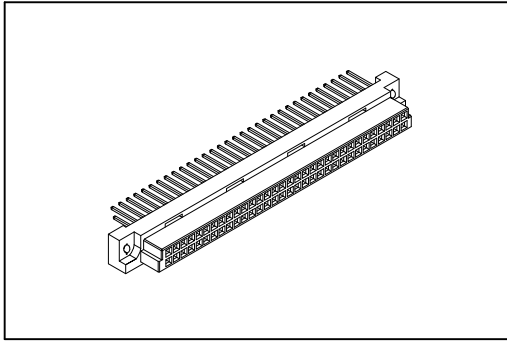

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 2 A.

Dielectric Withstanding Voltage: AC 1000V .



Insulator Resistance: 1000MΩ min.

Contact Resistance: 20mΩ max.


Operating Temperature: -55°C ~+125°C.

Features:



- * Mates with Male 2Row
- 9001-3164,3132 B Type.
- 9001-3364,3332 Q Type.

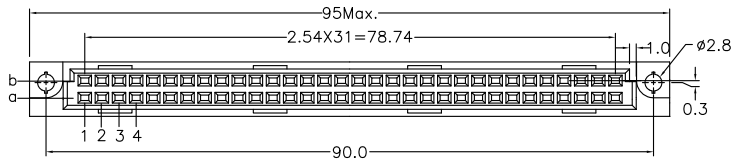

Dip Type



Press Fit Type

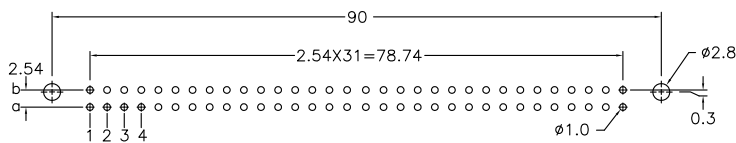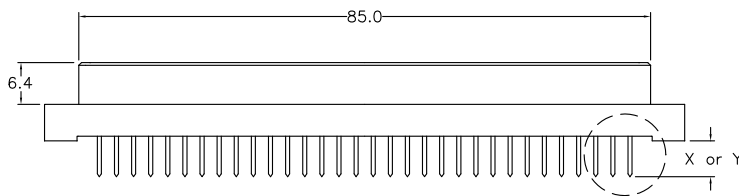

P.C. Board Layout

Length	1	2	W1	W2
X	4.0	2.5	13	17
Y	4.6	6.3	13	17
Pitch	Position	Rows with Contacts	Contact Arrange	
2.54mm	64	a b		
	32	a -		
5.08mm	32	a b		
	16	a -		

Ordering information

9001- **3** **2** **64** **1** **C** **00** **P** **L1** **A**
 Series 3: 2.54mm 2: Female Position 1: Dip Length 2: Dip Length C: Selective 00: G/F P: Blank: Dip L1: With Lock A: Tray
 4: 5.08mm W1: Dip Length W2: Dip Length Gold Plated Lock Package
 See Page CA03


9001 Series

DIN41612 Mating Introduce

2 Row insulator
 B (Standard mounting)
 Mounting axis
 of the connector

3 Row insulator
 C (Standard mounting)
 Mounting axis
 of the connector


Board lock available
 L1=P.C.B. Thickness 1.6 ~2.0 mm
 L2=P.C.B. Thickness 2.8 ~3.2 mm

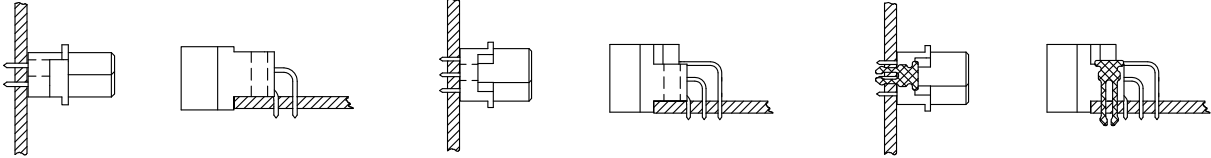

Q (Reverse mounting)
 Mounting axis
 of the connector

R (Reverse mounting)
 Mounting axis
 of the connector

Board lock available
 L1=P.C.B. Thickness 1.6 ~2.0 mm
 L2=P.C.B. Thickness 2.8 ~3.2 mm

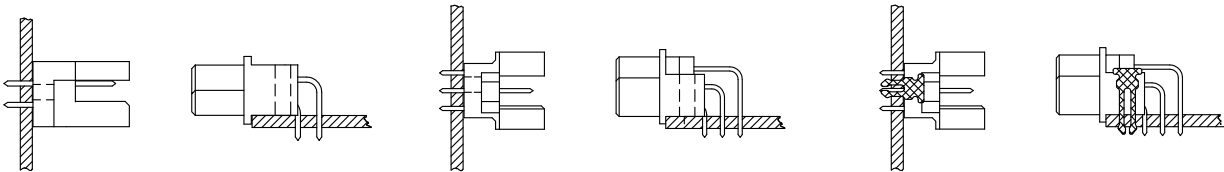

I.D.C. Type Ribbon Cable

Press Fit Type
 2 Row insulator

3 Row insulator

2 Row insulator

3 Row insulator

