


# 9001 Series

## DIN41612 R Type 150P Female

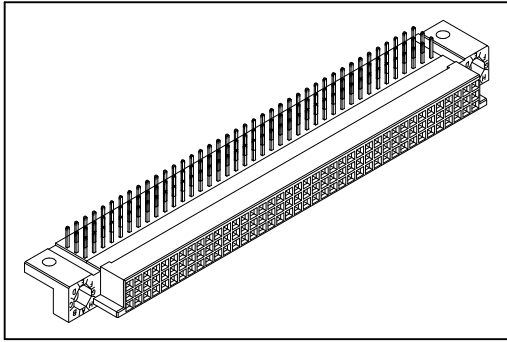

### Material:

Housing: High Temperature Plastic UL94V-0.

Contacts: Copper Alloy.

### Electrical Characteristics:

Current Rating: 2 A.

Dielectric Withstanding Voltage: AC 1000V.





Insulator Resistance: 1000MΩ min.

Contact Resistance: 20mΩ max.

Operating Temperature: -55°C~+125°C.

### Features:

- \* Mates with Male 3Row  
9001-111501C, 131501C

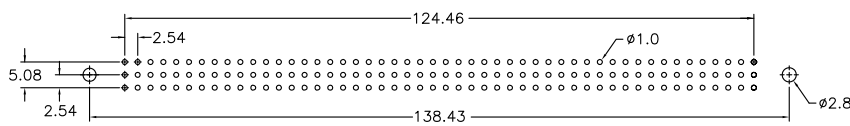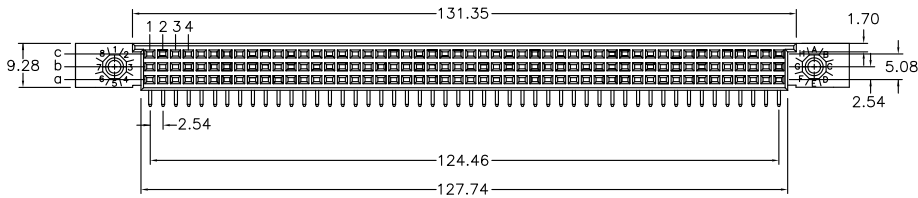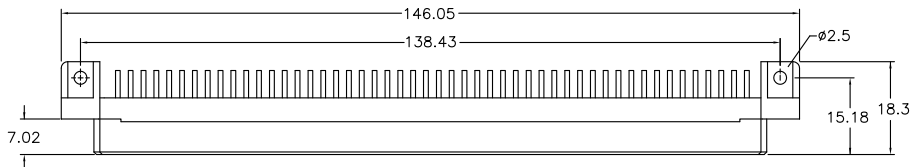

P.C. Board Layout

## Ordering information

9001- 1 4 150 1 C 00 A  
 Series 1: 2.54mm 4: Female Position 1: Dip Length C: Selective Gold Plated 00: G/F A: Tray Package