
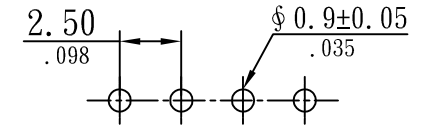


# 2.50mm(.098") WAFER 180°

## MATERIAL



Insulator: Nylon 66 UL 94V-0  
 Color: White  
 Contact: Brass 0.64mm(.025") square pins  
 Plating: Tin plated

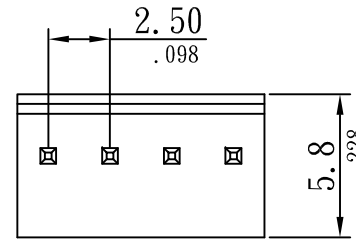

PCB LAYOUT

## SPECIFICATIONS


Temperature range: -25°C ~ +85°C  
 Current rating: 3.0A  
 Voltage rating: 250V AC  
 Dielectric withstand voltage: 800V AC  
 Insulation resistance: 1000 MΩ  
 Contact resistance: 0.02Ω Max.

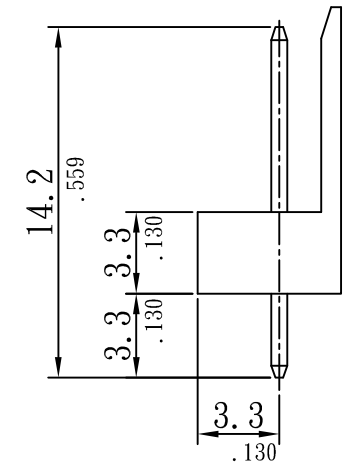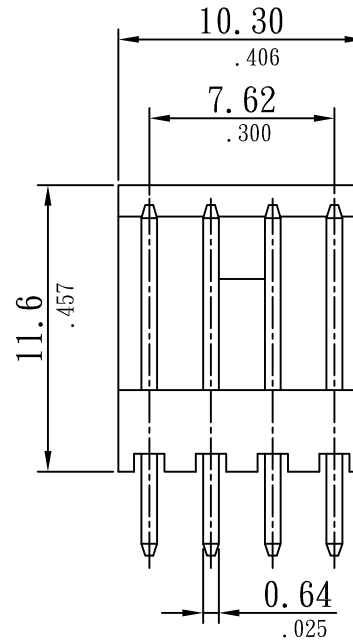

## Order Information

R 2591-04 T S-N  
 1 2 3 4 5

1. RoHS
2. Series No.
3. Pin No.
4. Tin plated
5. Straight

 Sunny Young Enterprise Co., Ltd.  
 S. Y. E. <http://www.sunnyyoung.com.tw>  
 No. 276, Nan Yang St., Hsi-Chih City, 221, Taipei County, Taiwan  
 Tel:+886 2 2694 5995(REP) Fax:+886 2 2694 3721

CHECKED	APPROVED	SCALE:1:3	REV NO	DATE	DESCRIPTION	BY	CHECKED	TOLERANCE UNLESS NOTED	
	TINA	UNIT: mm(in.)	A					LINEAR±	.0 ±0.30(.012)
DRAWN NAME	DATE	CAD NO	B						.00 ±0.20(.008)
									.000±0.10(.004)
PART NO	R2591-04TS-N	PC(S003)	2012.09.14	R2591-04TS-N	C			PROJECTION:	