
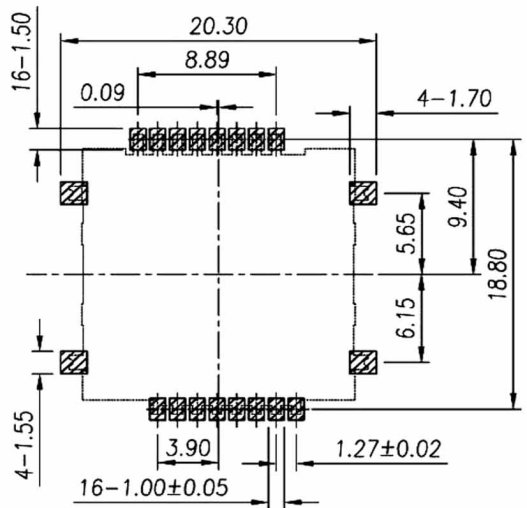
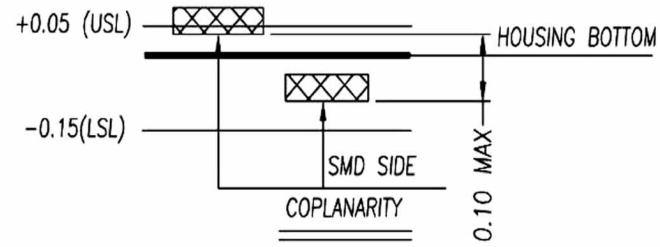


- NOTES:
- 1) MATERIAL:
    - 1-1. HOUSING: THERMOPLASTIC 94V-0, COLOR: BLACK
    - 1-2. CONTACT: COPPER ALLOY T=0.15mm
    - 1-3. SHELL: STAINLESS STEEL T=0.15mm
  - 2) FINISH:
    - 1-1 CONTACT: Au PLATING ON CONTACT AREA (SEE P/N DESCRIPTION)  
1u" Au OR 100u" MATTE Sn PLATING ON SOLDER TAILS  
80-120 u" NICKEL UNDERPLATING OVER ALL
    - 2-2. SHELL: G/F PLATING ON SOLDER TAILS  
50u" MIN. NICKEL UNDERPLATING OVER ALL
  - 3) SPECIFICATIONS:
    - 3-1. VOLTAGE RATING: 30V AC
    - 3-2. CURRENT RATING: 0.5A MAX
    - 3-3. INSULATION RESISTANCE: 100MEG.OHM MIN
    - 3-4. CONTACT RESISTANCE: 40 MILL.OHM MAX
    - 3-5. DIELECTRIC WITHSTANDING VOLTAGE: 250V AC FOR 1 MINUTE
    - 3-6. OPERATION TEMPERATURE: -40° TO +85°
    - 3-7. DURABILITY: 3000 CYCLES
    - 3-8. NORMAL FORCE: 30~70gf AT THE WORKING POSITION

- C1: VCC
- C2: RST
- C3: CLK
- C4: RESERVED
- C5: GND
- C6: VPP
- C7: I/O
- C8: RESERVED

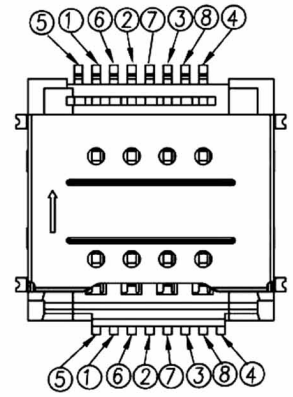

RECOMMENED P.C.B LAYOUT  
GENERAL TOLERANCE ± 0.05

RoHS Compliant		<b>玄茂科技股份有限公司</b> <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准 Betty	SCALE 比例 参考	TOLERANCE .X±0.35 X'±5' .XX±0.25 X'±3' .XXX±0.15 XX'±1'	PART NAME 品名 SIM CARD CONNECTOR 2X1 PORTS 16P SMT TYPE SELETIVE GOLD PLATING BLACK COLOR REEL PACKING ROHS
DWG. 製圖 Betty	UNIT 單位 MM	SIZE 紙張尺寸 A 4	PART NO. C0626-16DSBR00R
DATE 制表日 2013/03/15	PAGE 張數 1 OF 1	REV. 版次 A	料號