




REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 12/20/06		

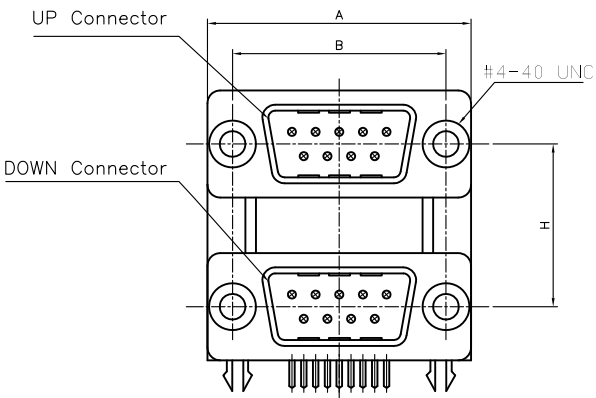



- NOTES:
- SPECIFICATION:
 - Current Rating: 3A.
 - Insulation Resistance: 1000MΩ min.
 - Dielectric Withstanding: 500V for One minute.
 - Contact resistance: 100mΩ max.
 - Operating Temperature: -40°C to +105°C
 - MATERIALS
 - Housing: PBT With 30% Glass Fiber(UL 94V-0)
 - Contact: Copper alloy.
 - Shell: Steel.
 - Board Lock: Copper alloy
 - Product Number code:

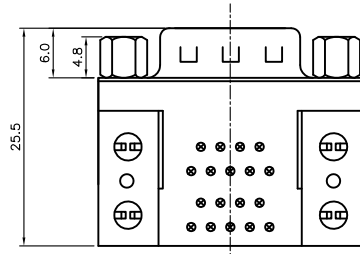

Positions	DIM A	DIM B
9	30.80	24.99
15	39.14	33.32
25	53.04	47.04

DS1082-01 - X X X X X X

- Screw type
 - 1: CC type
 - 2: CS type
 - 3: BB type
 - 4: BS type
- Central distance(DIM. H)
 - 1: 19.05mm
 - 2: 15.88mm
- Housing color
 - B: All black
- Contact plating
 - 0: Selective gold flash
 - 8: Full gold flash
- UP connector type
 - 9M: D-SUB standard 9pin male
 - 9F: D-SUB standard 9pin female
 - 15M: D-SUB standard 15pin male
 - 15F: D-SUB standard 15pin female
 - 25M: D-SUB standard 25pin male
 - 25F: D-SUB standard 25pin female
- DOWN connector type
 - 9M: D-SUB standard 9pin male
 - 9F: D-SUB standard 9pin female
 - 15M: D-SUB standard 15pin male
 - 15F: D-SUB standard 15pin female
 - 25M: D-SUB standard 25pin male
 - 25F: D-SUB standard 25pin female

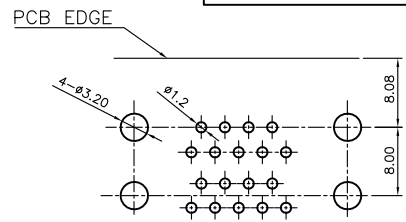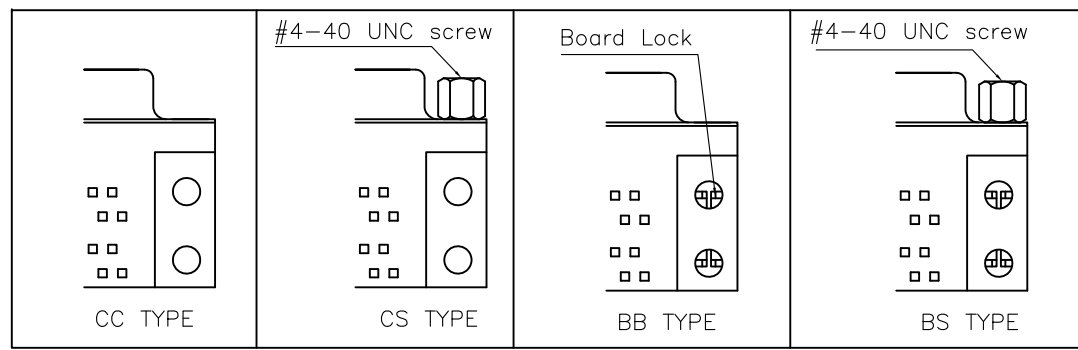


RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.60	X. ±5°
.X ±0.38	.X ±3°
.XX ±0.25	.XX ±2°

PROJECTION	TITLE
UNITS mm	D-SUB DUAL PORT TYPE
SHEET SIZE A4	SERIES DS1082-01 SERIES

DRAWING TYPE	CUSTOMER
SCALE 1:1	SHEET 1 OF 1
DRAWING NO. C-DS1082-01-XXXXXX	

 晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD