


SPECIFICATION FOR APPROVAL

REF :


PAGE: 1

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SQ4532□□□□3□-□□□
		ABC'S ITEM NO.	

. MECHANICAL DIMENSIONS :

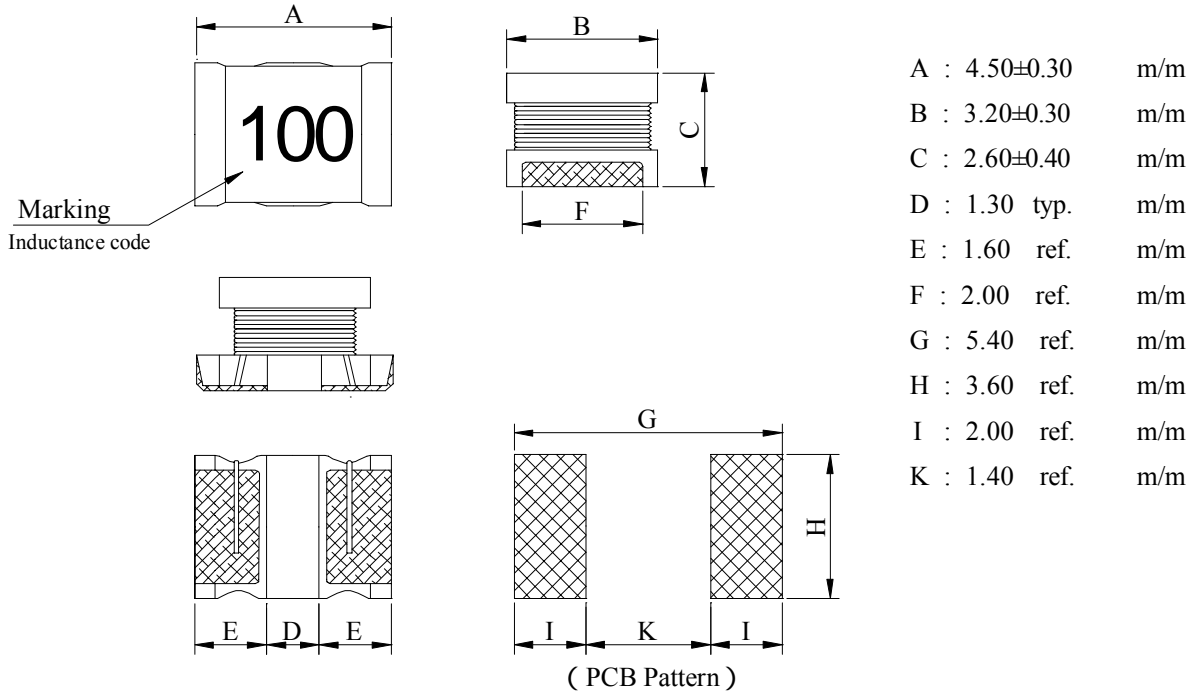


. SCHEMATIC DIAGRAM :



. MATERIALS LIST :


- a . Core : Ferrite core
- b . Wire : Enamelled copper wire (class F)
- c . Terminal : Ag/Ni/Sn
- d . Remark : Products comply with RoHS' requirements

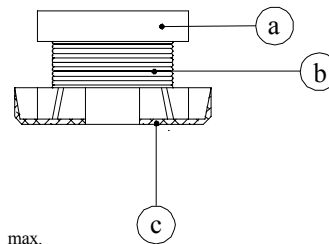

Peak Temp : 260 max.
 Max time above 230 : 50sec max.
 Max time above 200 : 70sec max.

. GENERAL SPECIFICATION :

- a . Temp. rise : 20 max
- b . Storage temp. : -40 ----+125
- c . Operating temp. : -25 ----+105
- d . Rated current (Irms) :
 Current cause inductance drop within 10%
- e . Resistance to solder heat : 260 .10 secs.

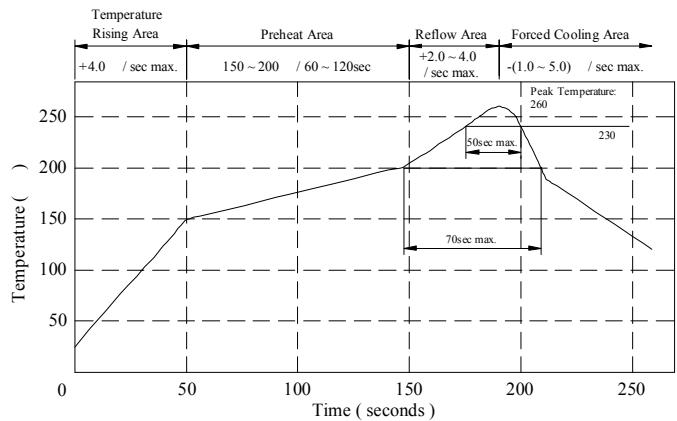

AR-001A

SPECIFICATION FOR APPROVAL

REF :

PAGE: 2

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SQ4532□□□□3□-□□□
		ABC'S ITEM NO.	

. ELECTRICAL CHARACTERISTICS :

DWG No.	Inductance (μ H)	Test Freq (Hz) L	SRF (MHz) min.	RDC (Ω) max.	IDC (mA) max.
SQ45321R0M3□-□□□	1.00±20%	1M	100.0	0.08	1080
SQ45321R5M3□-□□□	1.50±20%	1M	85.0	0.09	1000
SQ45322R2M3□-□□□	2.20±20%	1M	60.0	0.11	900
SQ45323R3M3□-□□□	3.30±20%	1M	47.0	0.13	800
SQ45324R7M3□-□□□	4.70±20%	1M	35.0	0.15	750
SQ45326R8M3□-□□□	6.80±20%	1M	30.0	0.20	720
SQ4532100K3□-□□□	10.00±10%	1M	23.0	0.24	650
SQ4532150K3□-□□□	15.00±10%	1M	20.0	0.32	570
SQ4532220K3□-□□□	22.00±10%	1M	15.0	0.60	420
SQ4532330K3□-□□□	33.00±10%	1M	12.0	1.00	310
SQ4532470K3□-□□□	47.00±10%	1M	10.0	1.10	280
SQ4532680K3□-□□□	68.00±10%	1M	8.4	1.70	220
SQ4532101K3□-□□□	100.00±10%	1M	6.8	2.20	190
SQ4532151K3□-□□□	150.00±10%	1M	5.5	3.50	130
SQ4532221K3□-□□□	220.00±10%	1M	4.5	4.00	110
SQ4532331K3□-□□□	330.00±10%	1M	3.6	6.80	100
SQ4532471K3□-□□□	470.00±10%	1M	3.0	8.50	90

- 1) . □ : Packaging Information... **A**: Bulk **B**: Taping Reel
 2) . "-□□□":Reference code

SPECIFICATION FOR APPROVAL


REF :

PAGE: 3


PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SQ4532□□□□3□-□□□
		ABC'S ITEM NO.	

PACKAGING INFORMATION :

(1) Configuration

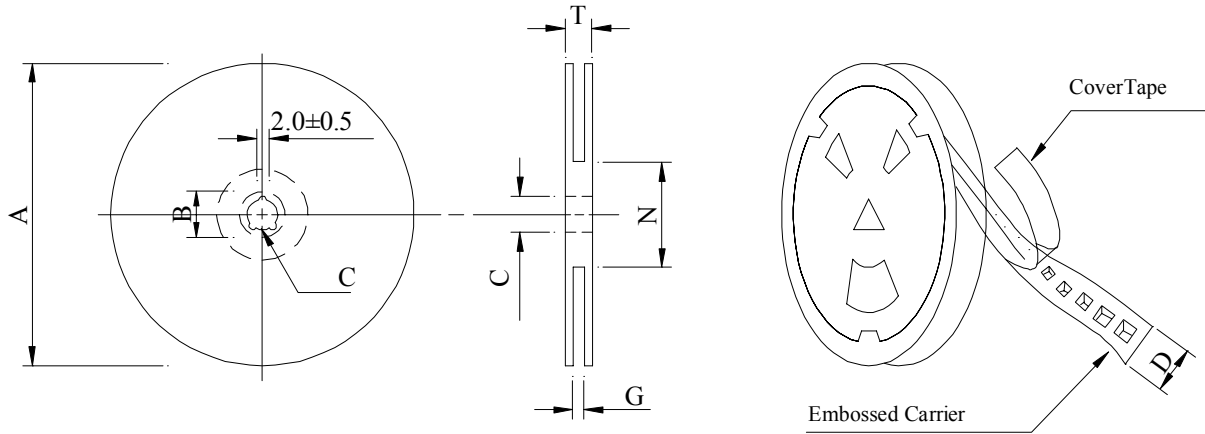

Carrier Tape Width : D

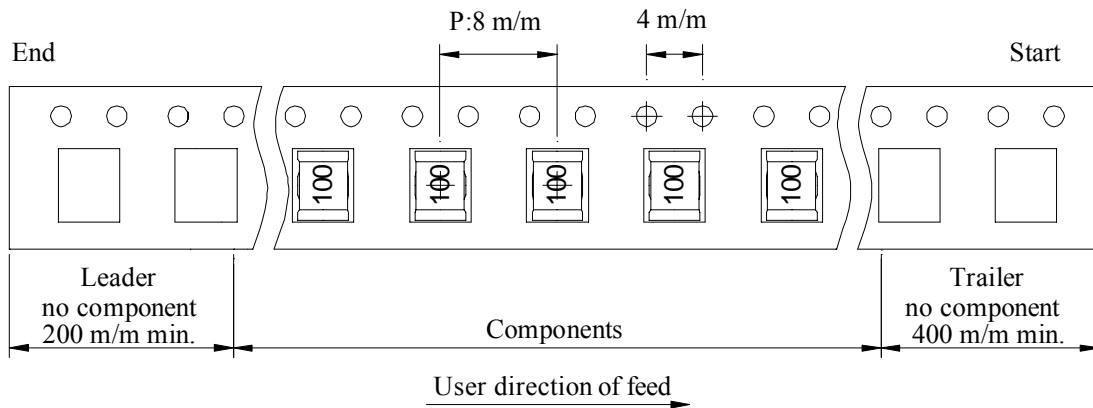

(2) Dimensions

Unit:m/m

STYLE	A	B	C	D	G	N	T
07 - 12	178	21±0.8	13	12	14 ⁺⁰	50 ⁻⁰	16.5
13 - 12	330	21±0.8	13±0.5	12	14 ⁺⁰	50 ⁻⁰	18.4

(3) Q'TY & G.W. Per package

Series	Inner : Reel			Outer : Carton		
	Q'TY (pcs)	G.W. (gw)	Style	Q'TY (pcs)	G.W. (Kg)	SIZE (cm)
SQ4532	500	130	07 - 12	20,000	7.20	42 x 41 x 24
SQ4532	2000	540	13 - 04	16,000	6.50	40 x 40 x 24

AR-001A



SPECIFICATION FOR APPROVAL

REF :

PAGE: 5

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO. ABC'S ITEM NO.	SQ4532□□□□3□-□□□						
. RELIABILITY TEST :									
Test item	Specification	Test condition							
Solderability	More than 90% of the terminal electrode shall be covered With fresh solder.	Preheat : 150±25 for 60 seconds Solder : Sn96.5 / Ag3 / Cu0.5 or equivalent Solder temp. : 235±5 Flux : Rosin Dip time : 4±1 seconds							
Thermal shock test (Temp. cycle)	Inductance shall not change more than ±10%	<table style="width: 100%; border: none;"> <tr> <td style="border: none;">Room temp. 15 minutes</td> <td style="border: none; text-align: center;">→</td> <td style="border: none; text-align: center;">-25±2 30 minutes</td> </tr> <tr> <td style="border: none;">Room temp. 15 minutes</td> <td style="border: none; text-align: center;">→</td> <td style="border: none; text-align: center;">85±2 30 minutes</td> </tr> </table> <p>Total : 50 cycles</p>		Room temp. 15 minutes	→	-25±2 30 minutes	Room temp. 15 minutes	→	85±2 30 minutes
Room temp. 15 minutes	→	-25±2 30 minutes							
Room temp. 15 minutes	→	85±2 30 minutes							
Humidity Resistance test		Temperature : 40±2 Humidity : 90 ~ 95% Applied current : Per spec. Time : 500 hours							
High temp. Resistance test		Temperature : 105±2 Applied current : Per spec. Time : 500 hours							

AR-001A



SPECIFICATION FOR APPROVAL

REF :

PAGE: 6

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO. ABC'S ITEM NO.	SQ4532□□□□3□-□□□
---------------	--------------------	---------------------------------	------------------

. UL CARD :

OBMW2 September 8, 2000

Magnet Wire-Component

JUNG SHING WIRE CO LTD E174837

231 CHUNG CHENG RD, SEC 3 JEN-TEH HSIANG, TAINAN
HSIEN TAIWAN

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
AIW	---	Polyamideimide	---	---	MW81-C	220
CFUEWB	---	Polyurethane	---	---	MW75C	130
EIAIW	---	Polyesterimide	Polyamideimide	---	MW35C	200
EILOCKY	---	Polyesterimide	Polyamide	---	---	180
EILOCKW	---	Polyesterimide	Modified Epoxy	---	---	200
EIW	---	Polyesterimide	---	---	---	220
EIW-2	---	Polyesterimide	---	---	MW74-C	200
FL.EILOCKY	---	Modified Polyester	Polyamide	---	---	155
LSFFW	---	Polyurethane	---	---	MW79-C	155
LSUEW	---	Polyurethane	---	---	---	130
PEW	---	Polyester	---	---	---	155
PEY	---	Polyester	Nylon	---	MW24-C	155
SF.FLW	---	Modified Polyester	---	---	MW26C	155
SF.EIW	---	Polyesterimide	---	---	MW77C	180
SF.BY@	---	Modified Polyester	Nylon	---	MW27-C	155
SF.FLY@	---	Modified Polyester	Nylon	---	MW27-C	155
SF.BLOCKBS	---	Modified Polyester	Modified Polyamide	---	---	155
SF.EILOCKY#	---	Polyesterimide	Polyamide	---	---	180
SF.EILOCKBS	---	Polyesterimide	Modified Polyamide	---	---	180
SF.BW@	---	Modified Polyester	---	---	MW26C	155
SFFW	---	Polyurethane	---	---	MW79	155

287806002 Page 1 of 2

A not-for-profit organization dedicated to public safety and committed to quality service

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
SFFY	---	Polyurethane	Polyamide	---	MW80C	155
UEW-1	---	Polyurethane	---	---	MW2-C	105
UEW-2	---	Polyurethane	---	---	---	130
UEW-4	---	Polyurethane	---	---	MW75C	130
UEY	---	Polyurethane	Nylon	---	MW28-C	130
UEY-2	---	Polyurethane	Polyamide	---	MW28-C	130

@-May be suffixed by LZ; # - May be suffixed by LZ, EL or LZI.
 LZ - Signifies magnd wires twisted together; EL - signifies base coated magnet wire laid parallel with top coat applied overall; LZL - signifies base coated magnet wire twisted together and covered with top coat overall.
 Marking: Company name or trademarks **(JSW)** or 榮星電線, material designation or marked designation on packaed or reel, and Recognized Component Mark.

See General Information Preceding These Recognitions
 For use only in equipment where the acceptability of the combination is determined by Underwriters Laboratories Inc.

287806002 Page 2 of 2

OBMW2E174837
September 8, 2000

AR-001A

