

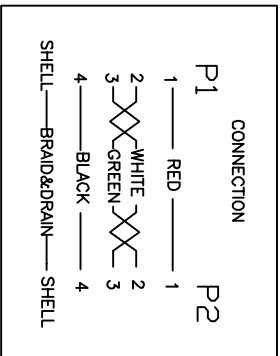


图号 DRAWING	变更内容 Revision Note	日期 DATE	修改人 REVISED BY	批准 APPROVED BY

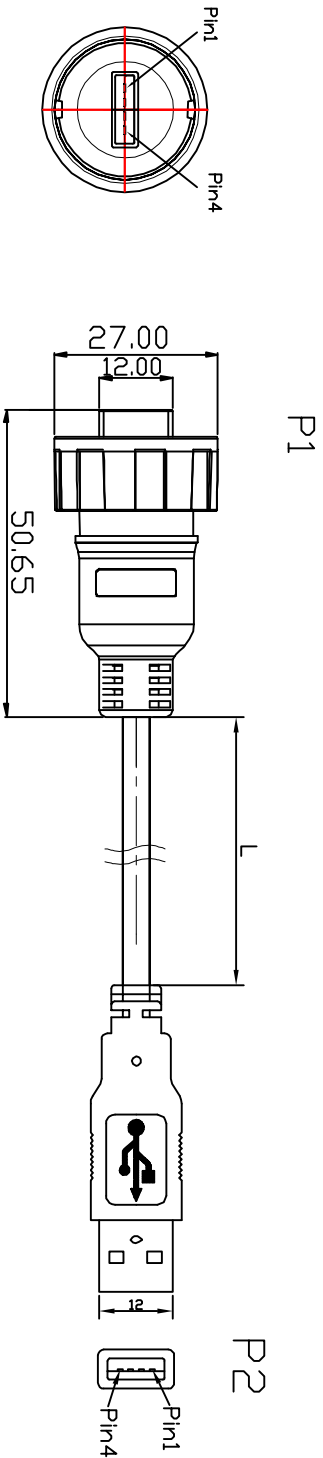

- NOTE:**
1. ALL materials be must ROHS
 2. Electrical Testing:
 - a. OPEN/SHORT: 100% Testing
 - b. Insulation Resistance: DC300V 10MΩ (MIN)
 - c. Contact Resistance: 1Ω (MAX)
 3. Protection level : IP67

1	2	3	4	5	6
6	CABLE	UL2725 28AWG*1P+24AWG*2C+AL/My+B PVC BLACK OD: 4.50			
5	PVC	PVC MOLDED: 45P COLOR: BLACK			
4	CAP	PBT4830 UL94V0			
3	NUT	PBT4830 UL94V0			
2	USB A/M	CONNECTOR G/F, SHEEL PLATEDNi, INSULATION WHITE			
1	USB A/M	CONNECTOR G/F, SHEEL PLATEDNi, INSULATION WHITE			
NO	PARTS	DESCRIBE			



视图 VIEW	比例 SCALE	公差 TOLERANCE
1:1	1:1	ACR: ±1 X: ±0.40 X.X: ±0.30 X.XX: ±0.20 X.XXX: ±0.10

未注公差
GENERAL TOLERANCE

东莞市康耀五金塑胶有限公司
Dongguan Conyao hardware Plastic Co., LTD
TEL: +86-769-82384960 FAX: +86-769-82384961

日期 DATE	日期 DATE	产品名称 PRODUCT NAME	产品编号 PRODUCT NUMBER
09.12.16		USB 2.0 MM waterproof-MM cable	1R2-AWW-A-***