


NUMBER C-179518
 METRIC
 3rd ANGLE PROJECTION

179518-1 : 本 ☒

179518-1 : AS SHOWN

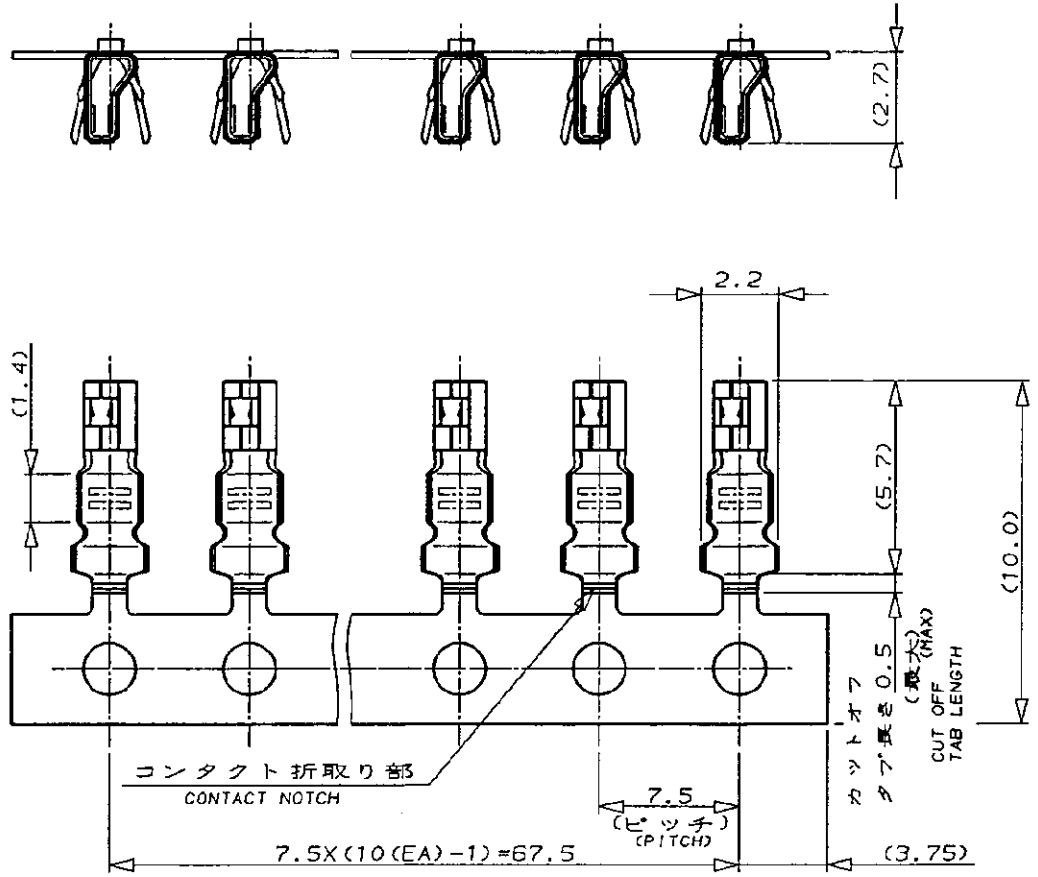

- 注;
- ① 材料 錫めつき溶接青銅 (板厚0.2)
 - 2 適用製品規格; 108-5408
 - 3 取付適用規格; 114-5179
 - 4 連鎖状端子型番; 179227-1 (折取り部なし)

- NOTES;
- ① MATERIAL PRE-TIN PHOS.BRO (THK 0.2)
 - 2 PRODUCT SPEC. ; 108-5408
 - 3 APPLICATION SPEC. ; 114-5179
 - 4 STRIP TERMINAL ; 179227-1 (W/O NOTCH)

DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT

PRINT DIST	P REVISED PER ECO-11-005294		RK	HMR	06APR 11	SCALE	SIZE	LOC	NUMBER	REV.	SHEET
	LTR	REVISION RECORD	DR	CHK	DATE	—#—	A	J	C-179518	P	1 OF 1
	DR.	J. Furuya 3/15/94	DE.	J. Furuya 3/15/94	NAME		CRIMP TYPE II REC. CONTACT (L/P) 圧着タイプIIリセコンタクト (ペラ状) (AMP CTコネクタ 2mmピッチ) (AMP CT CONN. 2mm PITCH)				
CHK.	S. Kubouchi 7/15/94	APP.	S. Kubouchi 7/15/94								



GENERAL TOLERANCE	WIRE RANGE	INSULATION DIA.
0<mm≤10 ; ±0.2 10<mm≤30 ; ±0.25 30<mm≤100 ; ±0.3 ANGLES ; ±3°	0.12 -0.37 mm ² (AWG26-22)	0.93~1.5 mmφ
MATERIAL	SEE NOTE ①	FINISH
注 ① 参照		注 ① 参照

CUSTOMER DRAWING

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[179518-1](#)