

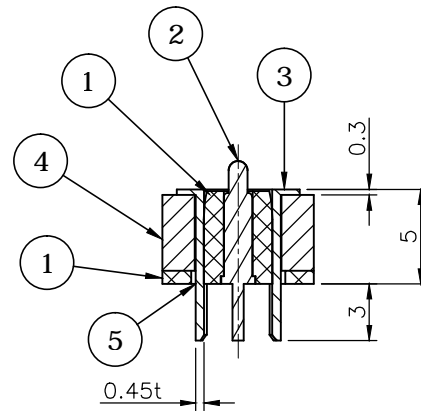
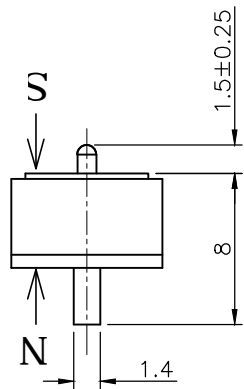
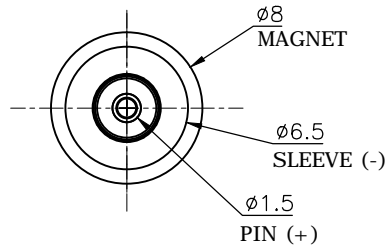


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2022/03/10





RECOMMENDED LAYOUT
GENERAL TOLERANCE: ±0.05mm

SPECIFICATION:

1. Contact Resistance: 50mΩ
2. Contact Force: 80g±20g at 1.1 working stroke
3. Durability: 20,000 Cycle Min.
4. Operating Temperature Range: -30°C~+60°C
3. Soldering by manual only

303D-D080F02	2A	12VDC	200g
Match P/N	Current	Voltage	Magnetic Adsorption Force

5	GLUE	LSR-67		
4	MAGNET	N52 NdFeB, Nickel plating		
3	SLEEVE	Lead Free Brass, Nickel plating		
2	POGO PIN	Lead Free Brass, 10u" Gold plating, over Nickel		
1	HOUSING	HTN, UL94V-0, Black		
NO.	PART NAME	DESCRIPTION		
UNLESS OTHERWISE SPECIFIED TOLERANCE				
UNIT:	SIZE	LINEAR	ANGLES	
mm	0~6	±0.1	±2°	
	6~30	±0.2		
	30~150	±0.3		
 www.attend.com.tw				
DRAWN	Fros	2022/03/10	DRAWN NAME:	
CHECKED	Tim	2022/03/10	Pogo Pin Magnet Type, 2P 8.0D, DIP, 10u", 200g, 2A, black	
APPROVED	Ken	2022/03/10	PRODUCT NO. 303D-D080M02	
	SCALE 2.5	SHEET 1/1	SIZE A4	FILE NAME 303D-D080M02_B_1