

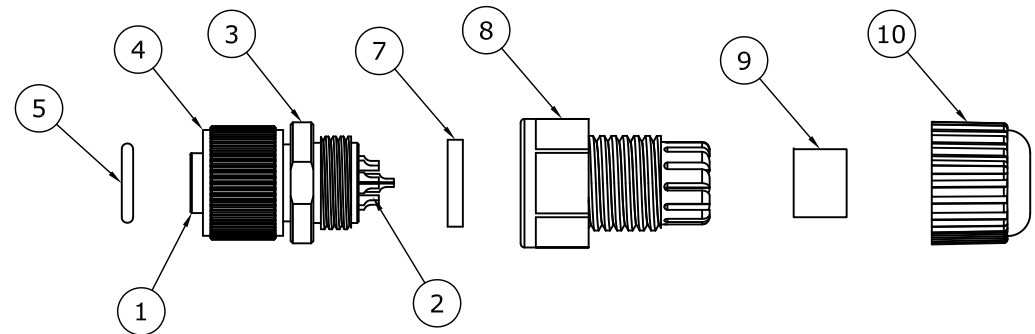
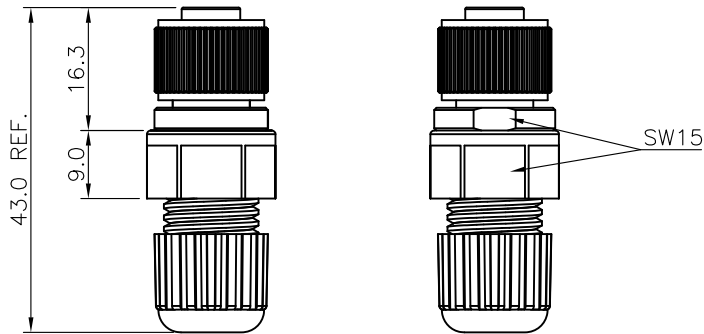


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2023/10/23



SPECIFICATION:

1. Current Rating: 1.5A
2. Voltage Rating: 30V
3. Waterproof: IPX7 or IP67
4. Operating temperature range: -40°C~+85°C



Recommend cable OD=5.0~6.8mm

NO.	PART NAME	DESCRIPTION
10	SEALING NUT	PA66
9	SEAL	Silicone, gray
8	CLAMP RING	PA66
7	GASKET	Silicone, gray
6	EPOXY	black
5	ORING	EPDM
4	NUT	Aluminum alloy, sating nickel plated
3	SHELL	Brass, nickel plated
2	CONTACT	Brass, gold flash plating over Nickel
1	HOUSING	PBT, UL94V-0, Black

UNLESS OTHERWISE SPECIFIED TOLERANCE					
UNIT:	DECIMAL	LINEAR	ANGLES		
mm	X.	±0.50	±5°	www.attend.com.tw	
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Fros	2023/10/23	DRAWN NAME: M12 A- Code Plug for Cable, 12 Pin Female For Field Installable, Plastic, G/F		
CHECKED	Tim	2023/10/23	PRODUCT NO. 216A-12FF1		
APPROVED	Ken	2023/10/23	FILE NAME 216A-12FF1_B_1		
	SCALE 1/1	SHEET 1/1	SIZE A4		