
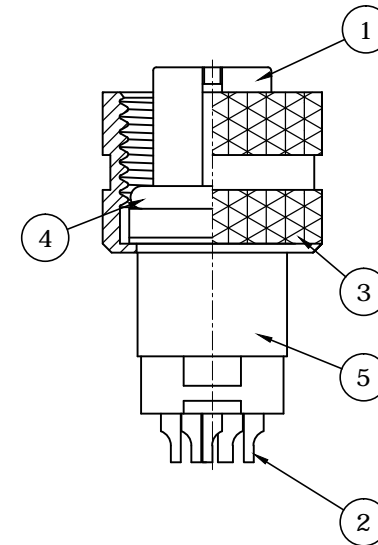


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2017/08/09
2	ECR220421001	TIM	2022/04/21

SPECIFICATION:


1. Current Rating: 2A
2. Voltage Rating: 30V
3. Waterproof: IPX7
4. Operating temperature range: -40°C~ +85°C

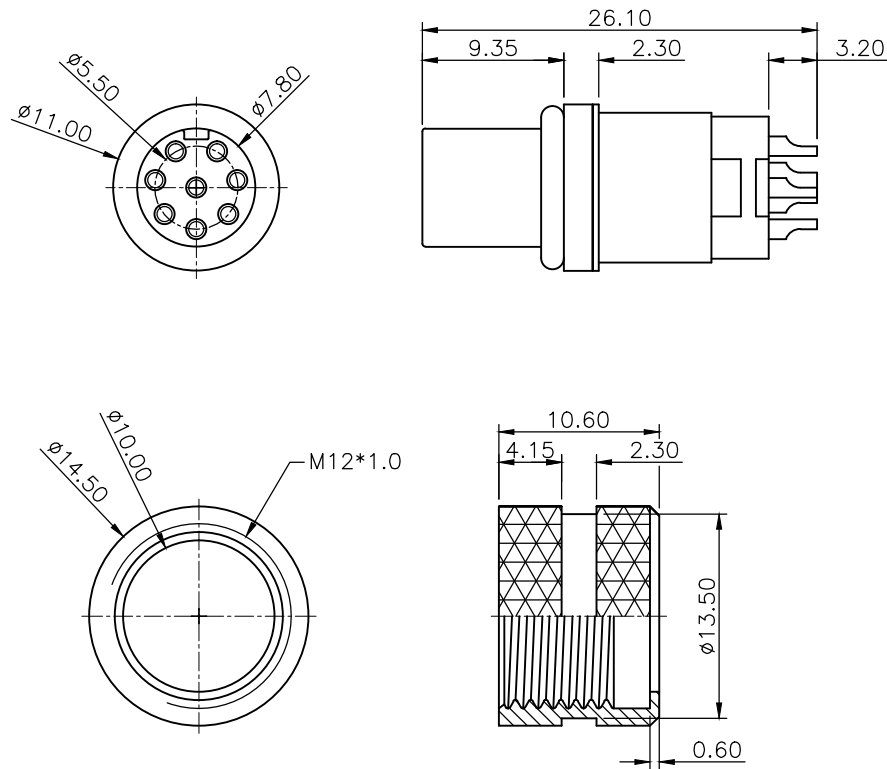

NUT

5	SHELL	BRASS, NICKEL PLATED
4	O-RING	EPDM, BLACK
3	NUT	BRASS, NICKEL PLATED
2	CONTACT	BRASS, GOLD PLATED UNDER NICKEL
1	HOUSING	PBT, UL94V-0, BLACK
NO.	PART NAME	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°



WWW.ATTEND.COM.TW

DRAWN	Tim	2017/08/09	DRAWN NAME:
CHECKED	Fros	2017/08/09	M12 A-Code Plug for Cable 8Pin Female For Overmold, w/Shell
APPROVED	Ken	2017/08/09	PRODUCT NO. 216A-08FO0
SCALE	2/1	SHEET	1/1
SIZE	A4	FILE NAME	216A-08FO0_B_2