
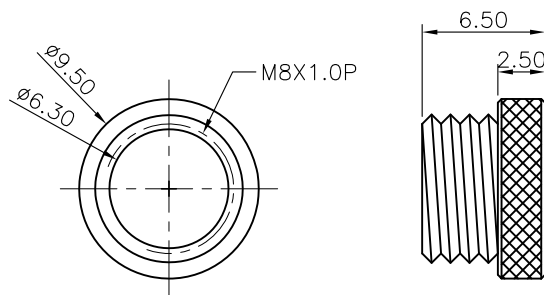
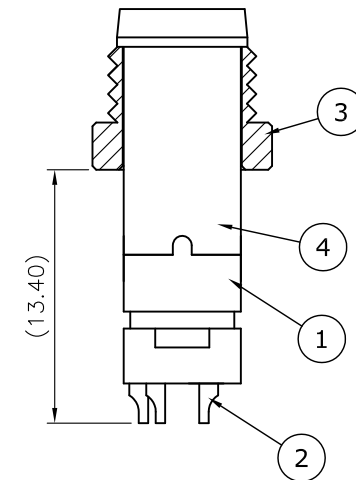


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2017/04/28
2	ECR220421002	Fros	2022/04/21


SPECIFICATION:

1. CURRENT RATING: 1.5A
2. VOLTAGE: 30VAC/DC
3. WATER PROOF: IPX7
4. OPERATION TEMPERATURE: -40°C TO +85°C

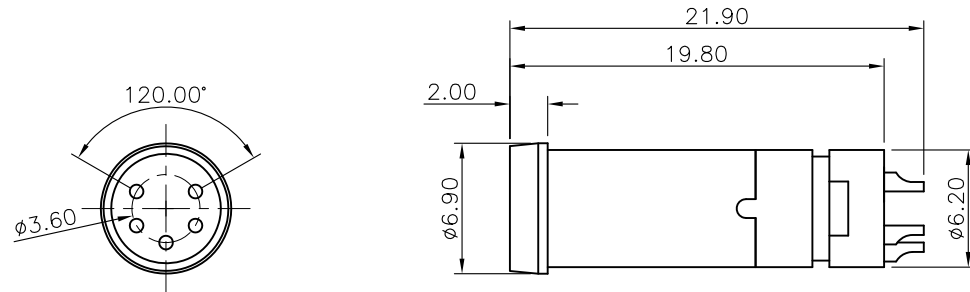

NUT

4	SHELL	Brass, Nickel plating
3	NUT	Brass, Nickel plating
2	CONTACT	Brass, Gold plating over Nickel
1	HOUSING	PBT, UL94V-0, Black
NO	PART NAME	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE					
UNIT:	DECIMAL	LINEAR	ANGLES		
mm	X.	±0.50	±5°	WWW.ATTEND.COM.TW	
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Tim	2017/04/28	DRAWN NAME:		
CHECKED	Fros	2017/04/28	M8 A-Code Plug for Cable		
APPROVED	Ken	2017/04/28	5Pin Male For Overmold with Cable		
SCALE	SHEET	SIZE	FILE NAME	PRODUCT NO.	
2.5/1	1/1	A4	219A-05MO0_B_2	219A-05MO0	