www.ti.com

TRS3227 3-V TO 5.5-V SINGLE-CHANNEL RS-232 LINE DRIVER/RECEIVER WITH ±15-kV ESD PROTECTION


SLLS821-JULY 2007

FEATURES

- Meets or Exceeds the Requirements of TIA/EIA-232-F and ITU v.28 Standards
- Operates With 3-V to 5.5-V V_{CC} Supply
- Operates at Least 1 Mbit/s
- Low Standby Current . . . 1 μA Typ
- External Capacitors . . . 4 × 0.1 μF
- Accepts 5-V Logic Input With 3.3-V Supply
- Designed to Be Interchangeable With industry Standard '3227 Devices
- Latch-Up Performance Exceeds 100 mA Per JESD 78, Class II
- ESD Protection for RS-232 I/O Pins
 - ±15 kV Human-Body Model
 - ±8 kV IEC61000-4-2, Contact Discharge
 - ±8 kV IEC61000-4-2, Air-Gap Discharge
- Auto-Powerdown Plus Feature Automatically Disables Drivers for Power Savings
- Packaged in Plastic Shrink Small-Outline Package

APPLICATIONS

- Battery-Powered, Hand-Held, and Portable Equipment
- PDAs and Palmtop PCs
- Notebooks, Sub-Notebooks, and Laptops
- Digital Cameras
- Mobile Phones and Wireless Devices



DESCRIPTION/ORDERING INFORMATION

The TRS3227 consists of one line driver, one line receiver, and a dual charge-pump circuit with ±15-kV ESD protection pin to pin (serial-port connection pins, including GND). The device meets the requirements of TIA/EIA-232-F and provides the electrical interface between an asynchronous communication controller and the serial-port connector. The charge pump and four small external capacitors allow operation from a single 3-V to 5.5-V supply. This device operates at data-signaling rates of 1 Mbit/s in normal operating mode and a maximum of 30-V/µs driver output slew rate. This device also features a logic-level output (READY) that asserts when the charge pump is regulating and the device is ready to begin transmitting.

The TRS3227 achieves a 1-µA supply current using the auto-powerdown plus feature. This device automatically enters a low-power powerdown mode when the RS-232 cable is disconnected or the drivers of the connected peripherals are inactive for more than 30 s. It turns on again when it senses a valid transition at any driver or receiver input. Auto-powerdown saves power without changes to the existing BIOS or operating system.

The TRS3227C is characterized for operation from 0°C to 70°C. The TRS3227I is characterized for operation from -40°C to 85°C.

ORDERING INFORMATION

T _A	PACKA	PACKAGE ⁽¹⁾⁽²⁾ ORDERABLE PART NUMBER		TOP-SIDE MARKING
0°C to 70°C	SSOP - DB	Reel of 2000	TRS3227CDBR	RS27C
-40°C to 85°C	SSOP - DB	Reel of 2000	TRS3227IDBR	RS27I

Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

⁽²⁾ For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI website at www.ti.com.

3-V TO 5.5-V SINGLE-CHANNEL RS-232 LINE DRIVER/RECEIVER WITH ± 15 -kV ESD PROTECTION



SLLS821-JULY 2007

FUNCTION TABLE(1)

	INPUT C	ONDITIONS			OUTPUT S	STATES		
FORCEON	FORCEOFF	RECEIVER OR DRIVER EDGE WITHIN 30 s	VALID RS-232 LEVEL PRESENT AT RECEIVER	DRIVER	RECEIVER	INVALID	READY	OPERATING MODE
			Auto-F	Powerdowr	Plus Conditi	ions		
Н	Н	NO	NO	Active	Active	L	Н	Normal operation, auto-powerdown plus disabled
Н	Н	NO	YES	Active	Active	Н	Н	Normal operation, auto-powerdown plus disabled
L	Н	YES	NO	Active	Active	L	Н	Normal operation, auto-powerdown plus enabled
L	Н	YES	YES	Active	Active	Н	Н	Normal operation, auto-powerdown plus enabled
L	Н	NO	NO	Z	Active	L	L	Powerdown, auto-powerdown plus enabled
L	Н	NO	YES	Z	Active	Н	L	Powerdown, auto-powerdown plus enabled
Х	L	Х	NO	Z	Active	L	L	Manual powerdown
Х	L	Х	YES	Z	Active	Н	L	Manual powerdown
			Aut	o-Powerdo	wn Condition	ıs		
INVALID	INVALID	Х	NO	Z	Active	L	L	Powerdown, auto-powerdown enabled
INVALID	INVALID	X	YES	Active	Active	Н	н	Normal operation, auto-powerdown enabled

⁽¹⁾ H = high level, L = low level, X = irrelevant, Z = high impedance


TRS3227 3-V TO 5.5-V SINGLE-CHANNEL RS-232 LINE DRIVER/RECEIVER WITH $\pm 15\text{-kV}$ ESD PROTECTION

SLLS821-JULY 2007

TERMINAL FUNCTIONS

TERMINA	AL	DESCRIPTION
NAME	NO.	DESCRIPTION
C1+	2	Positive terminal of voltage-doubler charge-pump capacitor
C1-	4	Negative terminal of voltage-doubler charge-pump capacitor
C2+	5	Positive terminal of inverting charge-pump capacitor
C2-	6	Negative terminal of inverting charge-pump capacitor
DIN	11	CMOS driver input
DOUT 13 RS-232 driver output		
FORCEOFF	16	Force-off input, active low. Drive low to shut down drivers, receivers, and charge pump. This overrides auto-shutdown and FORCEON (see Function Table).
FORCEON	12	Force-on input, active high. Drive high to override powerdown, keeping drivers and receivers on (FORCEOFF must be high) (see Function Table).
GND	14	Ground
INVALID	10	Valid signal detector output, active low. A logic high indicates that a valid RS-232 level is present on a receiver input.
READY	1	Ready to transmit output, active high. READY is enabled high when V- goes below -3.5 V and the device is ready to transmit.
RIN	8	RS-232 receiver input
ROUT	9	CMOS receiver output
V+	3	$+2 \times V_{CC}$ generated by the charge pump
V-	7	$-2 \times V_{CC}$ generated by the charge pump
V _{CC}	15	3-V to 5.5-V single-supply voltage

LOGIC DIAGRAM (POSITIVE LOGIC)

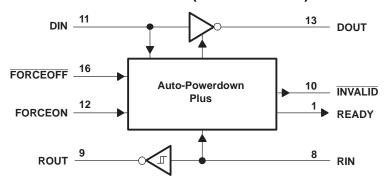

TRS3227

3-V TO 5.5-V SINGLE-CHANNEL RS-232 LINE DRIVER/RECEIVER WITH ±15-kV ESD PROTECTION



SLLS821-JULY 2007

Absolute Maximum Ratings⁽¹⁾

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
V _{CC}	Supply voltage range ⁽²⁾		-0.3	6	V
V+	Positive output supply voltage range (2)		-0.3	7	V
V-	Negative output supply voltage range (2)		0.3	-7	V
V+ - V-	Supply voltage difference ⁽²⁾			13	V
V	Input voltage range	Driver (FORCEOFF, FORCEON)	-0.3	6	V
V _I	input voltage range	Receiver	-25	25	
V	Output valtage range	Driver	-13.2	13.2	V
Vo	Output voltage range	Receiver (INVALID, READY)	-0.3	$V_{CC} + 0.3$	V
	Short-circuit duration	DOUT to GND		Unlimited	
θ_{JA}	Package thermal impedance (3)			82	°C/W
	Lead temperature 1,6 mm (1/16 in) from case	se for 10 s		260	°C
T _{stg}	Storage temperature range		-65	150	°C

⁽¹⁾ Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

Recommended Operating Conditions(1)

See Figure 5

				MIN	NOM	MAX	UNIT
	Supply voltage		V _{CC} = 3.3 V	3	3.3	3.6	V
	Driver and control low-level input voltage DIN, FORCEOFF, FORCEON Receiver input voltage	V _{CC} = 5 V	4.5	5	5.5	L v	
V	Driver and control high-level input voltage	DIN FORCEOFF FORCEON	$V_{CC} = 3.3 \text{ V}$	2		5.5	V
V_{IH}		DIN, FORCEOFF, FORCEON	$V_{CC} = 5 V$	2.4		5.5	'
V_{IL}	Driver and control low-level input voltage	DIN, FORCEOFF, FORCEON		0		0.8	V
VI	Receiver input voltage			-25		25	V
т	Operating free cir temperature		TRS3227C	0		70	°C
IA	Operating nee-an temperature	TRS3227I	-40		85		

⁽¹⁾ Test conditions are C1–C4 = 0.1 μ F at V_{CC} = 3.3 V \pm 0.3 V; C1 = 0.047 μ F, C2–C4 = 0.33 μ F at V_{CC} = 5 V \pm 0.5 V.

Electrical Characteristics(1)

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 5)

	PARA	METER	TEST CONDITIONS	MIN	TYP ⁽²⁾	MAX	UNIT	
I	Input leakage current	FORCEOFF, FORCEON			±0.01	±1	μA	
1	Supply current	,	Auto-powerdown plus disabled	No load, FORCEOFF and FORCEON at V _{CC}		0.3	2	mA
		Powered off	No load, FORCEOFF at GND		1	10		
ICC	(T _A = 25°C)	Auto-powerdown plus enabled	No load, FORCEOFF at V _{CC} , FORCEON at GND, All RIN are open or grounded		1	10	μΑ	

⁽¹⁾ Test conditions are C1–C4 = 0.1 μ F at V_{CC} = 3.3 V \pm 0.3 V; C1 = 0.047 μ F, C2–C4 = 0.33 μ F at V_{CC} = 5 V \pm 0.5 V. (2) All typical values are at V_{CC} = 3.3 V or V_{CC} = 5 V, and T_A = 25°C.

All voltages are with respect to network GND.

⁽³⁾ The package thermal impedance is calculated in accordance with JESD 51-7.

TRS3227 3-V TO 5.5-V SINGLE-CHANNEL RS-232 LINE DRIVER/RECEIVER WITH ±15-kV ESD PROTECTION

SLLS821-JULY 2007

DRIVER SECTION

Electrical Characteristics(1)

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 1 and Figure 2)

	PARAMETER	TEST C	ONDITIONS		MIN	TYP ⁽²⁾	MAX	UNIT
V_{OH}	High-level output voltage	DOUT at $R_L = 3 \text{ k}\Omega$ to GND,	DIN = GND		5	5.4		V
V_{OL}	Low-level output voltage	DOUT at $R_L = 3 \text{ k}\Omega$ to GND,	$DIN = V_{CC}$		-5	-5.4		V
I_{IH}	High-level input current	$V_I = V_{CC}$				±0.01	±1	μΑ
$I_{\rm IL}$	Low-level input current	V _I at GND				±0.01	±1	μA
	Short-circuit output current (3)	$V_{CC} = 3.6 \text{ V},$	$V_O = 0 V$			±35	±60	mA
los	Short-circuit output current	$V_{CC} = 5.5 \text{ V},$	$V_O = 0 V$			±35	±60	IIIA
r _o	Output resistance	V_{CC} , V+, and V- = 0 V,	V _O = ±2 V		300	10M		Ω
I _{off}	Output leakage current	FORCEOFF = GND,	$V_0 = \pm 12 V$,	$V_{CC} = 0 \text{ to } 5.5 \text{ V}$			±25	μΑ

Switching Characteristics⁽¹⁾

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 1 and Figure 2)

	PARAMETER	Т	EST CONDITIONS		MIN	TYP ⁽²⁾	MAX	UNIT
		C _L = 1000 pF, One DIN switching,	$R_L = 3 \text{ k}\Omega$, See Figure 1		250			
Maximum data rate	C _L = 1000 pF, V _{CC} = 4.5 V,	$R_L = 3 \text{ k}\Omega$, See Figure 1	One DIN switching,	1000			kbit/s	
		C _L = 250 pF, V _{CC} = 3 V,	$R_L = 3 \text{ k}\Omega,$ See Figure 1	One DIN switching,	1000			İ
t _{sk(p)}	Pulse skew ⁽³⁾	C _L = 150 pF to 2500 pF,	$R_L = 3 \text{ k}\Omega \text{ to } 7 \text{ k}\Omega,$	See Figure 2		25		ns
SR(tr)	Slew rate, transition region	$V_{CC} = 3.3 \text{ V},$ $C_L = 150 \text{ pF to } 1000 \text{ pF},$	$R_L = 3 \text{ k}\Omega \text{ to } 7 \text{ k}\Omega,$ See Figure 1		24		150	V/µs

⁽¹⁾ Test conditions are C1–C4 = 0.1 μ F at V_{CC} = 3.3 V \pm 0.3 V; C1 = 0.047 μ F, C2–C4 = 0.33 μ F at V_{CC} = 5 V \pm 0.5 V. (2) All typical values are at V_{CC} = 3.3 V or V_{CC} = 5 V, and V_{CC} = 5 V. (3) Pulse skew is defined as $|V_{CC}| = 1000$ f each channel of the same device.

ESD Protection

TERMI	NAL	TEST COMPITIONS	TVD	LINIT
NAME	NO.	TEST CONDITIONS	TYP	UNIT
		Human-Body Model	±15	
DOUT	13	Contact Discharge (IEC61000-4-2)	±8	kV
		Air-Gap Discharge (IEC61000-4-2)	±8	

 ⁽¹⁾ Test conditions are C1–C4 = 0.1 μF at V_{CC} = 3.3 V ± 0.3 V; C1 = 0.047 μF, C2–C4 = 0.33 μF at V_{CC} = 5 V ± 0.5 V.
 (2) All typical values are at V_{CC} = 3.3 V or V_{CC} = 5 V, and T_A = 25°C.
 (3) Short-circuit durations should be controlled to prevent exceeding the device absolute power dissipation ratings, and not more than one output should be shorted at a time.

3-V TO 5.5-V SINGLE-CHANNEL RS-232 LINE DRIVER/RECEIVER WITH ±15-kV ESD PROTECTION

ISTRUMENTS www.ti.com

SLLS821-JULY 2007

RECEIVER SECTION

Electrical Characteristics⁽¹⁾

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 3)

	PARAMETER	TEST CONDITIONS	MIN	TYP ⁽²⁾	MAX	UNIT
V_{OH}	High-level output voltage	$I_{OH} = -1 \text{ mA}$	V _{CC} - 0.6	V _{CC} - 0.1		V
V_{OL}	Low-level output voltage	I _{OL} = 1.6 mA			0.4	V
V	Positive going input threshold voltage	V _{CC} = 3.3 V		1.5	2.4	V
V _{IT+}	Positive-going input threshold voltage	V _{CC} = 5 V		1.8	2.4	V
V _{IT} _	Negative-going input threshold voltage	V _{CC} = 3.3 V	0.6	1.2		V
v IT-	Negative-going input tilleshold voltage	V _{CC} = 5 V	0.8	1.5		V
V_{hys}	Input hysteresis (V _{IT+} - V _{IT-})			0.5		V
I_{off}	Output leakage current			±0.05	±10	μA
r _l	Input resistance	$V_1 = \pm 3 \text{ V to } \pm 25 \text{ V}$	3	5	7	kΩ

⁽¹⁾ Test conditions are C1–C4 = 0.1 μ F at V_{CC} = 3.3 V \pm 0.3 V; C1 = 0.047 μ F, C2–C4 = 0.33 μ F at V_{CC} = 5 V \pm 0.5 V. (2) All typical values are at V_{CC} = 3.3 V or V_{CC} = 5 V, and T_A = 25°C.

Switching Characteristics⁽¹⁾

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	TYP ⁽²⁾	UNIT
t _{PLH}	Propagation delay time, low- to high-level output	C _L = 150 pF, See Figure 3	150	ns
t _{PHL}	Propagation delay time, high- to low-level output	C _L = 150 pF, See Figure 3	150	ns
t _{sk(p)}	Pulse skew ⁽³⁾	See Figure 3	50	ns

⁽¹⁾ Test conditions are C1–C4 = 0.1 μ F at V_{CC} = 3.3 $V \pm 0.3$ V; C1 = 0.047 μ F, C2–C4 = 0.33 μ F at V_{CC} = 5 $V \pm 0.5$ V. (2) All typical values are at V_{CC} = 3.3 V or V_{CC} = 5 V, and T_A = 25°C. (3) Pulse skew is defined as $|t_{PLH}|$ of each channel of the same device.

ESD Protection

TERM	INAL	TEST CONDITIONS	TYP	UNIT
NAME	NO.	TEST CONDITIONS	ITP	UNIT
		Human-Body Model	±15	
RIN	8	Contact Discharge (IEC61000-4-2)	±8	kV
		Air-Gap Discharge (IEC61000-4-2)	±15	

TRS3227 3-V TO 5.5-V SINGLE-CHANNEL RS-232 LINE DRIVER/RECEIVER WITH \pm 15-kV ESD PROTECTION

SLLS821-JULY 2007

AUTO-POWERDOWN SECTION

Electrical Characteristics

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 4)

	PARAMETER	TEST CONDITIONS	MIN	MAX	UNIT
V _{T+(valid)}	Receiver input threshold for INVALID high-level output voltage	FORCEON = GND, FORCEOFF = V _{CC}		2.7	V
V _{T-(valid)}	Receiver input threshold for INVALID high-level output voltage	FORCEON = GND, FORCEOFF = V _{CC}	-2.7		V
V _{T(invalid)}	Receiver input threshold for INVALID low-level output voltage	FORCEON = GND, FORCEOFF = V _{CC}	-0.3	0.3	V
V _{OH}	INVALID, READY output voltage high	I _{OH} = -1 mA, FORCEON = GND, FORCEOFF = V _{CC}	V _{CC} - 0.6		V
V _{OL}	INVALID, READY output voltage low	I _{OL} = 1.6 mA, FORCEON = GND, FORCEOFF = V _{CC}		0.4	V

Switching Characteristics


over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 4)

	PARAMETER		MIN	TYP ⁽¹⁾	MAX	UNIT
t_{INVH}	Propagation delay time, low- to high-level output			1		μs
t _{INVL}	Propagation delay time, high- to low-level output			30		μs
t _{WU}	Supply enable time			100		μs
t _{AUTOPRDN}	Driver or receiver edge to driver's shutdown	V _{CC} = 5 V	15	30	60	s

⁽¹⁾ All typical values are at V_{CC} = 3.3 V or V_{CC} = 5 V, and T_A = 25°C.




PARAMETER MEASUREMENT INFORMATION

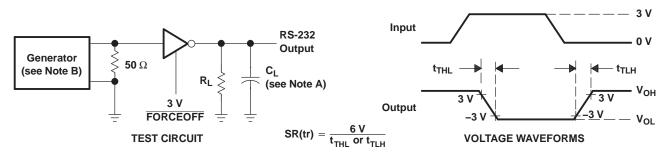

NOTES: A. C_L includes probe and jig capacitance.

B. The pulse generator has the following characteristics: PRR = 250 kbit/s, Z_{O} = 50 Ω , 50% duty cycle, t_{f} \leq 10 ns, t_{f} \leq 10 n


Figure 1. Driver Slew Rate

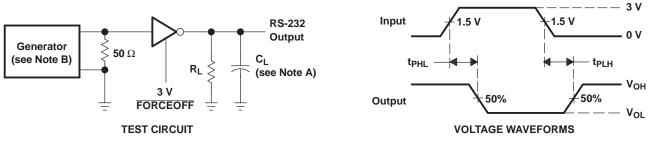

NOTES: A. C_I includes probe and jig capacitance.

B. The pulse generator has the following characteristics: PRR = 250 kbit/s, Z_{O} = 50 Ω , 50% duty cycle, t_{f} \leq 10 ns, t_{f} \leq 10 ns.

Figure 2. Driver Pulse Skew

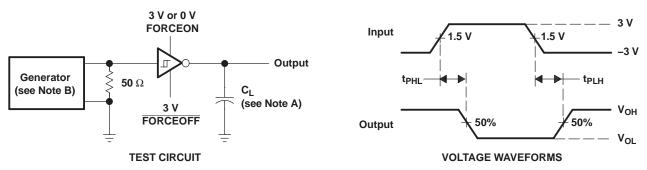

NOTES: A. C_L includes probe and jig capacitance.


B. The pulse generator has the following characteristics: $Z_0 = 50 \Omega$, 50% duty cycle, $t_r \le 10$ ns. $t_f \le 10$ ns.

Figure 3. Receiver Propagation Delay Times

3-V TO 5.5-V SINGLE-CHANNEL RS-232 LINE DRIVER/RECEIVER WITH ±15-kV ESD PROTECTION

SLLS821-JULY 2007

PARAMETER MEASUREMENT INFORMATION (continued)

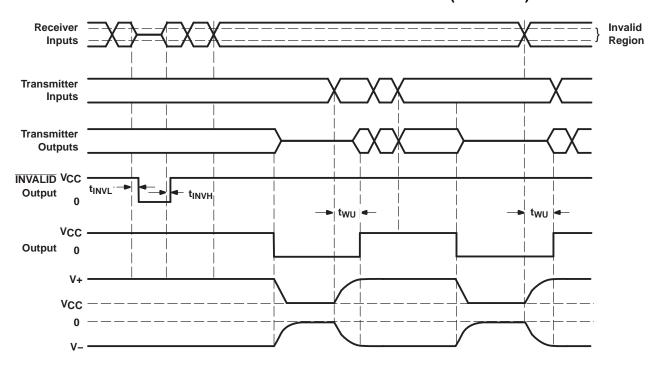

VOLTAGE WAVEFORMS


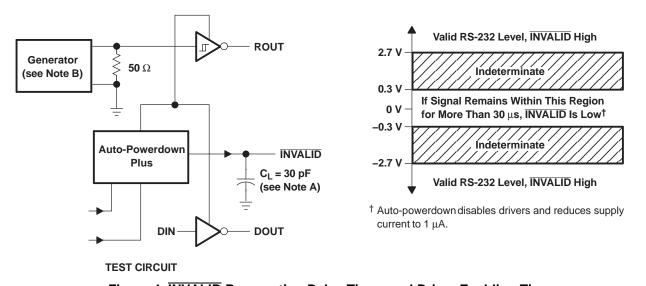


Figure 4. INVALID Propagation Delay Times and Driver Enabling Time



APPLICATION INFORMATION

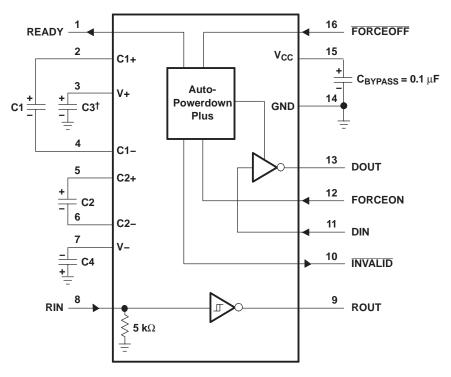

 $^{^{\}dagger}$ C3 can be connected to V_{CC} or GND.

- NOTES: A. Resistor values shown are nominal.
 - B. Nonpolarized ceramic capacitors are acceptable. If polarized tantalum or electrolytic capacitors are used, they should be connected as shown.

V_{CC} vs CAPACITOR VALUES

V _{CC}	C1	C2, C3, and C4				
$\begin{array}{c} 3.3 \text{ V} \pm 0.3 \text{ V} \\ 5 \text{ V} \pm 0.5 \text{ V} \\ 3 \text{ V to } 5.5 \text{ V} \end{array}$	0.1 μF 0.047 μF 0.1 μF	0.1 μF 0.33 μF 0.47 μF				

Figure 5. Typical Operating Circuit and Capacitor Values

www.ti.com 15-Dec-2023

PACKAGING INFORMATION

Orderable Device	Status	Package Type	Package Drawing	Pins	Package Qty	Eco Plan	Lead finish/ Ball material	MSL Peak Temp	Op Temp (°C)	Device Marking (4/5)	Samples
TRS3227CDBR	ACTIVE	SSOP	DB	16	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	0 to 70	RS27C	Samples
TRS3227IDB	LIFEBUY	SSOP	DB	16	80	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	RS27I	
TRS3227IDBR	LIFEBUY	SSOP	DB	16	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	RS27I	

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

- (3) MSL, Peak Temp. The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.
- ⁽⁴⁾ There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.
- (5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.
- (6) Lead finish/Ball material Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.



PACKAGE OPTION ADDENDUM

www.ti.com 15-Dec-2023

PACKAGE MATERIALS INFORMATION

www.ti.com 16-Dec-2023

TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TRS3227CDBR	SSOP	DB	16	2000	330.0	16.4	8.35	6.6	2.4	12.0	16.0	Q1
TRS3227IDBR	SSOP	DB	16	2000	330.0	16.4	8.35	6.6	2.4	12.0	16.0	Q1

www.ti.com 16-Dec-2023



*All dimensions are nominal

Device	Package Type Package Drawing		Pins SPQ I		Length (mm)	Width (mm)	Height (mm)	
TRS3227CDBR	SSOP	DB	16	2000	356.0	356.0	35.0	
TRS3227IDBR	SSOP	DB	16	2000	356.0	356.0	35.0	

PACKAGE MATERIALS INFORMATION

www.ti.com 16-Dec-2023

TUBE



*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
TRS3227IDB	DB	SSOP	16	80	530	10.5	4000	4.1



SMALL OUTLINE PACKAGE



NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
 4. Reference JEDEC registration MO-150.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 5. Publication IPC-7351 may have alternate designs.
- 6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 8. Board assembly site may have different recommendations for stencil design.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2023, Texas Instruments Incorporated